



T-60W-12-WP-HW



T-150W-12-WP-HW


Power Supplies – IP67 rated Waterproof

Part Number	Description and Use	Dimensions
T-60W-12-WP-HW	60W 12V – IP67 rated waterproof LED hardwired	6-1/2" x 1-5/8" x 1-1/4"
T-150W-12-WP-HW	150W 12V – IP67 rated waterproof LED hardwired	7-3/8" x 2-3/8" x 1-1/2"


NOTE

- **DO NOT** connect low-voltage LED tape light to high-voltage power.
- Install in accordance with NEC and local regulations.
- Make all 120V AC connections inside UL Listed junction box
- Power Supply **cannot be dimmed** on the 120V AC side.
- For wireless switching, use low voltage controls on the 12V DC controls on the Power Supply (see pages 24-45)
- Install in an accessible, well-ventilated area such as sink base or on top of cabinet. For best operation, do not locate in an attic or other area of high ambient temperature.


Tools Needed

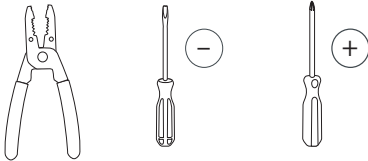


Product Legend



Wiring 120V AC side of Hardwired Waterproof Power Supply



1. Turn off 120V AC power at Circuit Breaker Panel.

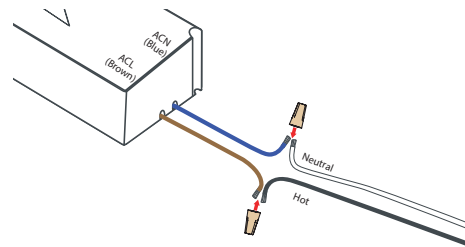

2. Using wire nuts, connect 120V AC wires to Power Supply. Hot to BROWN wire, Neutral to BLUE wire.
NOTE: Power Supply is IP67 rated waterproof, connections are not. Wire nuts or connection need sealed from water if placed in wet location.

