




SPECIFICATIONS
BFQ75
EXHAUST FANS

HVI 2100 CERTIFIED 70 CFM/1.5 Sones @ 0.10" SP., 32.2 Watts
57 CFM @ 0.25" SP.

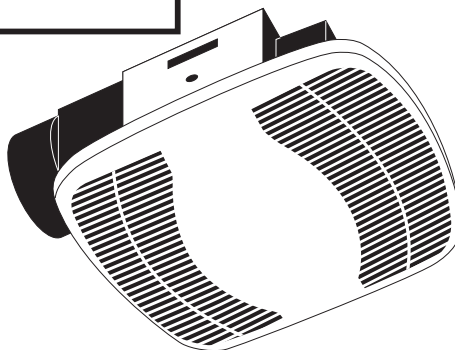

- Grill**
White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".
- Blower Wheel**
One piece polymeric wheel 5¹/₈" diameter, 2³/₈" wide, with 48 fins.
- Motor**
Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected, suitable for continuous operation. Rated 120 volts, 60 hz.
- Fan Housing**
PC/ABS polymeric, dimensions 8¹/₂" x 9¹/₈" x 4³/₄".
- Duct Collar**
Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.
- Ventilating Area**
For bathrooms up to 65 sq. ft. For other rooms up to 85 sq. ft.
- Single Pack Shipping Info**
Box Dim: 11" x 12" x 6"
UPC: 0-8316227501-1
Shipping Weight: 5¹/₄ lbs.

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



- Unit Mounting**
Designed to mount in ceilings with at least 6" of clearance. The unit is mounted directly to the joist using a separate lock-in bracket (included with unit). The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 8¹/₂" x 9¹/₈".

Suitable for wall insert mounting when discharged vertically and mounted outside of shower enclosure

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	HVI Sones @ .25 SP	Fan Speed RPM	Power Watts	Amps
	0	0.05	0.1	0.125	0.15	0.2	0.25	0.3					
Air Flow - CFM	79	74	70	68	66	62	57	50	1.5	2.0	1300	32.2	0.3

PROJECT					ARCHITECT				
LOCATION					ENGINEER				
CONTRACTOR					SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

