::kitchensource.com
☎ 1.800.667.8721

John BOOS
Since 1887

ASSEMBLY INSTRUCTIONS

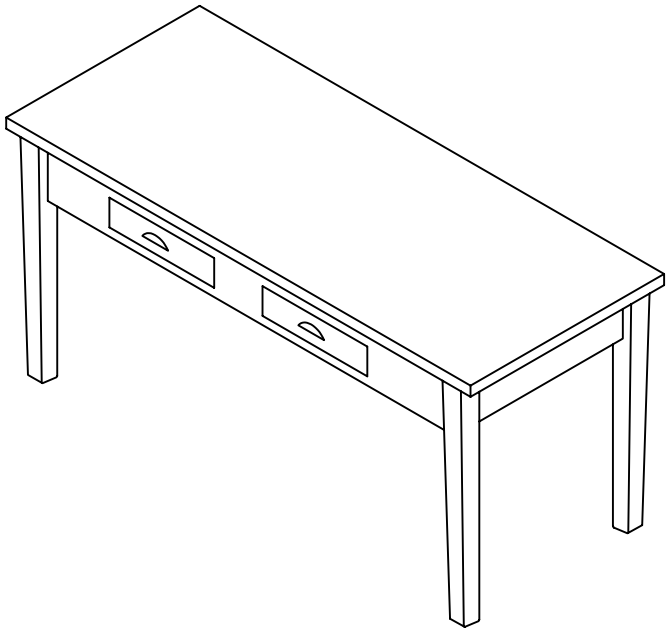

PARTS:
1–TOP AND APRONS
4–LEGS

HARDWARE:
8–3/8 X 2 LAG BOLTS
8–3/8 WASHERS
4–ADJUSTABLE FLOOR GLIDES W/ T–NUTS

TOOLS REQUIRED:
1–9/16 WRENCH
1–PHILLIPS SCREWDRIVER
1–HAMMER

CAUTION: MAKE CERTAIN ASSISTANCE IS AVAILABLE WHEN SETTING TABLE UPRIGHT TO AVOID INJURY TO YOURSELF OR THE TABLE.

SUGGESTION: APPLYING BAR SOAP TO BOLT OR SCREW THREADS WILL MAKE THEM MUCH EASIER TO INSERT AND LESSEN THE CHANCE OF BREAKAGE.

INSTRUCTIONS:
1–REMOVE ALL CONTENTS OF BOX, MAKING SURE ASSEMBLY AREA IS FLAT AND CLEAN.
2–PLACE TOP FACE DOWN ON RUG, CARTON, OR OTHER PROTECTED SURFACE.(NOTE: REMOVE DRAWERS OUT OF TOP PRIOR TO PLACING FACE DOWN.)
3–ATTACH EACH OF FOUR LEGS TO THE METAL BRACKETS AT EACH CORNER USING TWO 3/8 X 2 LAG BOLT WITH WASHER. TIGHTEN SECURELY, DO NOT OVER TIGHTEN!
4–INSERT T–NUTS INTO LEG BOTTOM AND HAMMER IN. SCREW IN ADJUSTABLE GLIDES INTO T–NUTS.
5–TURN TABLE RIGHT SIDE UP. ADJUST GLIDES UNTIL TABLE IS LEVEL. YOUR NEW TABLE IS NOW READY FOR USE. ENJOY!

BE SURE TO FOLLOW THE MAINTENANCE AND CARE GUIDELINES ON THE ENCLOSE SHEET FOR YOUR NEW JOHN BOOS PRODUCT.

NOTE: WHEN MOVING TABLE, NEVER PICK UP ONE END AND DRAG THE OTHER. THIS WILL CAUSE THE LEGS TO BECOME LOOSE TO MOVE, LIFT TABLE FROM BOTH ENDS AND CARRY, MAKING SURE ASSISTANCE IS AVAILABLE.