


Foldaway Bed Fittings

Bedlift foldaway bed fittings for lengthwise mounting

These fittings permit the construction of foldaway beds according to your own plan.

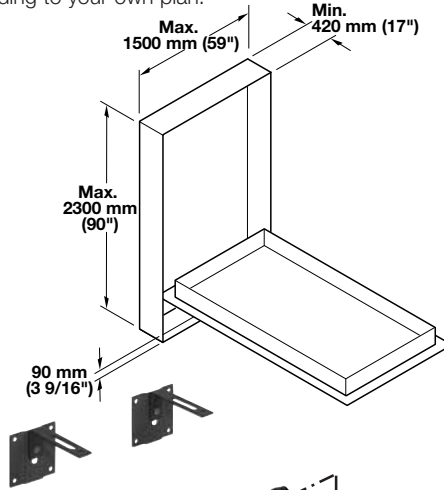

Gas pistons (pre-stressed with tightening strap).
Each bed requires 2 pcs. of gas pistons

Bed weight	Pushing Force	Cat. No.
50 kg. (110 lbs.)	900 N	271.99.220
60 kg. (132 lbs.)	1100 N	271.99.266
70 kg. (154 lbs.)	1300 N	271.99.300
80 kg. (176 lbs.)	1500 N	271.99.346
90 kg. (198 lbs.)	1700 N	271.99.382
100 kg. (220 lbs.)	1900 N	271.99.410

Packing: 1 pc.

The dimensions listed are internal cabinet dimensions.
The cabinet and bed box constructions require a wood thickness of 20 mm.


LGA quality certificate




Detailed **assembly instructions** are enclosed with every fitting set.

It is essential for foldaway beds to be **secured** against tipping, according to EN 1129.
(Check the floor for suitability)
Two safety stops are enclosed with every fitting set.

Instead of legs, large handles can be mounted which serve as supports when the bed is in the down position.



Another possibility is an overhead shelf.



Fitting set

Consisting of:

- 1 pair foldaway fittings with pivot bearing and positioning bolt for gas pistons
- 2 pcs. safety stops
- 1 pc. safety lever with stop plate

Cat. No. 271.95.200

Packing: 1 set with mounting material

Order gas-filled piston separately depending on bed weight.


Mattress length
+ 2 x bed frame thickness
+ 125 mm
= internal cabinet height
Mattress width
+ 2 x bed frame thickness
+ 54 mm
= internal cabinet width
Gap on four sides between cabinet and front panel.
= minimum 4 mm

For selecting the gas-loaded spring, the **bed weight** is needed.
bed box and slatted mattress frame
+ Mattress and bedding
= Bed weight

Retaining Straps for bedding with contact closing

for mattress width	Cat. No.
up to 900 mm	271.87.920
up to 1200 mm	271.87.921
up to 1400 mm	271.87.922
up to 1900 mm	271.87.923

Packing: 1 set

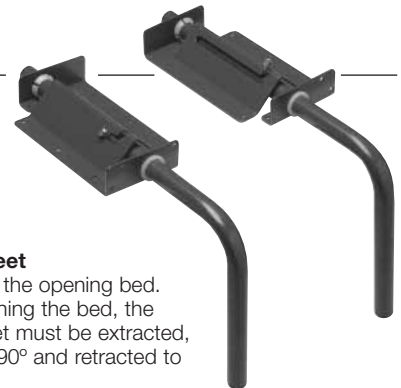

Angular feet

to support the opening bed.
When opening the bed, the angular feet must be extracted, turned by 90° and retracted to the stop.

Finish: steel, anthracite colored; powder-coated

Cat. No. 271.95.360

Packing: 1 pair



The angular feet with mounting plate are screw-mounted to the foot side of the bed frame and to the inside of the front panel.

A minimum 40 x 40 mm square beam is needed on four sides as slatted frame support.

Dimensions in mm
Inches are approximate

Call 1-800-667-8721 anywhere in the US and Canada - www.haef.com