

SPECIFICATION SHEET

Meridian Medicine Cabinet



FEATURES/TYPICAL SPECIFICATIONS


- Recess or Surface Mount Installation
 - Wall Opening/Rough-in Dimensions (for recess applications): 14" x 34" x 41/4"
- Formed and welded flush design steel housing (WB/ST)
 - 1/8" thick float glass mirror with polished edges on housing back
 - Electrical knock-outs for wire connections (3 typical)
 - 22 gauge steel construction with white, heat cured, acrylic paint finish
- · Frameless Mirror door
 - 5/32" thick float glass mirror door front with 1/2" beveled edges, 4 sides
 - 3/32" float glass mirror door back with polished edges
 - 24 gauge steel door back with white, heat cured, acrylic paint finish.
- 170° euro hinge with soft-close mechanism (HG02) (3 typical)
- Reversible for left-hand or right-hand door swing
- 3/16" thick float glass shelves, adjustable (ADJ) (3 typical)
- 120 V GFCI dual receptacle, tamper resistant per NEC code section 406.11 (1 typical)
- Snap-Fit shelf supports (20 typical)
- Includes installation hardware
- Standard Pallet Quantity of 12 units

NOTE: Surface mount installation requires a Surface Mount Kit, 760034 (not included)

Finishes:

Housing: PT01—Basic White Mirror: 1/2BVL-1/2" Bevel Edge

Frame: Frameless

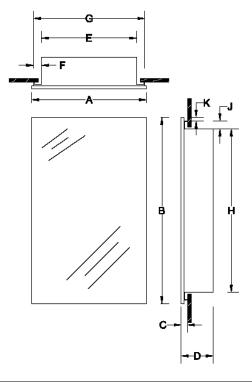

		Dimensions In Inches									
Model #	Description	Α	В	С	D	E	F	G	н	J	К
704309	MEDCAB 1DR 15X35 FMLS WB/ST	151/8	351/%	1	5	13½	3/4	15	33½	3/4	1/16

REFERENCE	QTY.	REMARKS	Project		
			Location		
			Architect		
			Engineer		
			Contractor		
			Submitted by	Date	

^{*} All models and material specifications are subject to change or withdrawal without notice.

S704309_A07