

TASK

Built-in Power Supply DV Series

Tamper-Resistant Single Receptacle Lighted Power Strip




kitchensource.com

1.800.667.8721

24-1/2 in. fixture shown in Satin Nickel with Grey receptacles and Grey switch LP24QD8NDGGSN30



Fixture Cross-Section

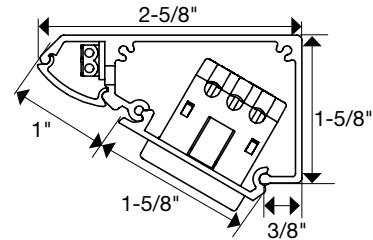

HIGH LIGHT OUTPUT – 4 WATTS PER FOOT

PART NUMBER	DESCRIPTION	LENGTH	# OF RECEPT.	RECEPT. COLOR	FINISH OPTION	LUMENS Based on 3000K (approx. per fixture)	KELVIN TEMP.
LP10QD2NDColorFinishTemp	10-1/2" DV Series LPS with 1 Single Receptacle. 2 watts per fixture. Built-in power supply. Rocker Switch.	10-1/2"	1	B, G, W	BK, BZ SN, WT	200	2700K (27) 3000K (30) 4000K (40) 5000K (50)
LP12QD4NDColorFinishTemp	12-1/2" DV Series LPS with 2 Single Receptacles. 4 watts per fixture. Built-in power supply. Rocker Switch.	12-1/2"	2	B, G, W	BK, BZ SN, WT	400	2700K (27) 3000K (30) 4000K (40) 5000K (50)
LP18QD6NDColorFinishTemp	18-1/2" DV Series LPS with 2 Single Receptacles. 6 watts per fixture. Built-in power supply. Rocker Switch.	18-1/2"	2	B, G, W	BK, BZ SN, WT	600	2700K (27) 3000K (30) 4000K (40) 5000K (50)
LP24QD8NDColorFinishTemp	24-1/2" DV Series LPS with 4 Single Receptacles. 8 watts per fixture. Built-in power supply. Rocker Switch.	24-1/2"	4	B, G, W	BK, BZ SN, WT	800	2700K (27) 3000K (30) 4000K (40) 5000K (50)
LP30QD10NDColorFinishTemp	30-1/2" DV Series LPS with 4 Single Receptacles. 10 watts per fixture. Built-in power supply. Rocker Switch.	30-1/2"	4	B, G, W	BK, BZ SN, WT	1000	2700K (27) 3000K (30) 4000K (40) 5000K (50)
LP36QD12NDColorFinishTemp	36-1/2" DV Series LPS with 4 Single Receptacles. 12 watts per fixture. Built-in power supply. Rocker Switch.	36-1/2"	4	B, G, W	BK, BZ SN, WT	1200	2700K (27) 3000K (30) 4000K (40) 5000K (50)

Blue indicates customer choice. Color indicates receptacle color, Finish indicates fixture finish color, and Temp indicates Kelvin Temperature

TECHNICAL INFORMATION

Series	LPS DV Series
Input Voltage	120 volts
Amps	15 amp
Color Temperature (Kelvin)	Warm white 2700K (27) Soft white 3000K (30) Cool white 4000K (40) Daylight white 5000K (50)
CRI (Color Rendering Index)	90+
Wattage	1/4 watt LEDs
Lumens	400 lumens per foot
Max Run	Refer to power supply specs
Cuttable	No
IP Rating	----
Dimmable	5%-100%
Rating	cULus Listed
Rated Life	50,000 hrs
LED Beam Angle	120°
LED Spacing	1/4"
LED Board	6" or 12"
Mounting	Wood Screws and Wall Anchors (included)
Wiring	12 gauge Romex for receptacles 18-20 gauge wire for LEDs
Environment	Dry locations
Construction Material	Powder coated aluminum, IR Acrylic (lens)
Warranty	5 years

FEATURES

- Low profile – 1-5/8"
- Built-in power supply – direct replacement for a stand-alone fluorescent light
- High LED diode density boards creates No Dot effect
- 120 volt fixture
- 15 amp tamper-resistant single receptacles
- 5-year limited warranty
- Available in standard lengths only
- Designed for indoor application
- Simple to install fully assembled fixture with wood screws and wall anchors (included with fixture)
- Dimming requires a dedicated circuit for the lighting

APPLICATIONS

- Kitchens
- Bathrooms
- Offices and computer labs
- Islands
- Shops and garages

COMPATIBLE SWITCH


PART NUMBER	DESCRIPTION	DIMENSIONS
DVELV-300P-Color	300W Diva slide dimmer.	4.69" x 2.94" x 1.31"

RECEPTACLE COLOR & FINISH OPTIONS


Receptacle Colors				
	Black (B)	Black (B)	Grey (G)	White (W)
Finish Options				
	Black (BK)	Bronze (BZ)	Satin Nickel (SN)	White (WT)

WITH Built-in power supply and switch – High light output – 4 watts per foot


36-1/2" Fixture – LP36QD12ND Color Finish Temp

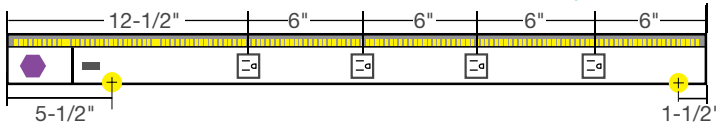


30-1/2" Fixture – LP30QD10ND Color Finish Temp

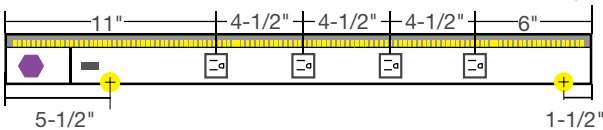


24-1/2" Fixture – LP24QD8ND Color Finish Temp

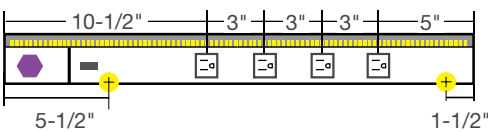


18-1/2" Fixture – LP18QD6ND Color Finish Temp

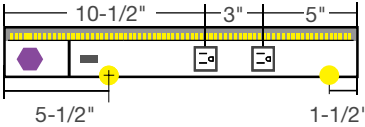

12-1/2" Fixture – LP12QD4ND Color Finish Temp








10-1/2" Fixture – LP10QDV2 Color Finish Temp



NOTE: 6" LED board is mounted in center of 10-1/2" fixture

LEGEND

-  = 15 amp receptacle available in Black (B), Grey (G), or White (W)
-  = Switch (Available in Black, Grey, or White – 4-1/2" from left side)
-  = Divider Plate (Low Voltage)
-  = Power Supply
-  = Knock-out (1-1/2" from right side – 5-1/2" from left side) located on back frame

