



12VDC

NEW!

# RGB Tunable FlexTape®

BALANCE

4.4W/ft.  
(14.4W/m)

Red	Green	Blue
48 Lumens per ft. (157 per meter)	121 Lumens per ft. (397 per meter)	35 Lumens per ft. (115 per meter)



Tresco®'s RGB Balance FlexTape® goes the distance, with 16 million color variations and On-Board Constant Current Regulators creating consistent dramatic lighting is a reality. Created for high-end projects including residential, hospitality and commercial.

### Why Balance

All tape lighting has inherent voltage drop. This voltage drop can cause color shift in longer runs of RGB. The On-Board Constant Current Regulators prevent this from happening resulting in balanced color from start to finish.

### Features:

120° beam angle

4.4W/ft.

Sold in 13' (4 m) roll

Cutttable every 1-5/8" (42 mm)

No soldering required – simple FlexConnect connectors (sold separately)

Precision tunable remote controls (sold separately)

### Typical Applications:

Under Cabinet

Interior Cabinets

Accent Lighting

Displays

Task Lighting

Store fixtures

Toe kick

Soffit

Backlighting



Cutttable every  
1-5/8"  
(42 mm)



16 million color combinations




No soldering required – simple FlexConnect connectors (sold separately)



Strong 300 LSE 3M™ adhesive backing




### Dimensions:

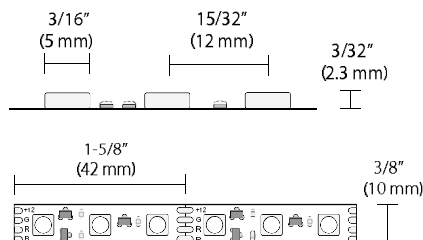

RGB Tunable FlexTape® can be used as a DIY option for flush and recessed Infinix. For other profiles, must be custom ordered.

Typical Setup:

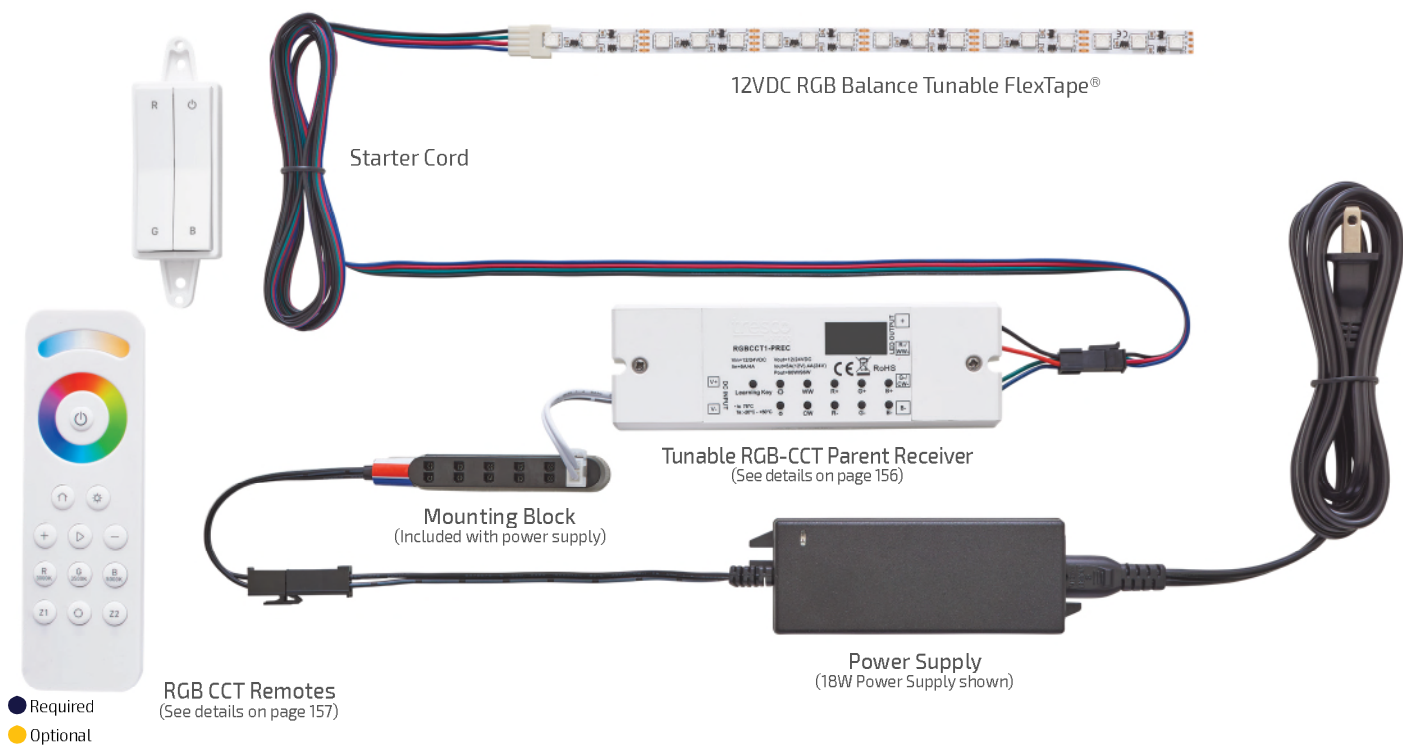

Accessories:

**Power Supplies**  
see power supply section

**RGB CCT Parent Receiver**  
L-RGBCCT1-PREC-1

**Starter Cord**  
L-TPEPKT-ZM-RGB-1  
L-TPEPKT-ZIN-RGB-1

**RGB CCT Remotes**  
see page 157

**6 Output Adaptor**  
L-4P60-1

**RGB CCT Child Receiver**  
L-RGBCCT1-CREC-1

**Back-to-Back Connector**  
L-TPE-BTB-RGB-1

**Link Cord**  
L-TPELNK5-RGB-1  
L-TPELNK15-RGB-1  
L-TPELNK25-RGB-1  
L-TPELNK60-RGB-1  
L-TPELNK120-RGB-1  
L-TPELNK180-RGB-1

**DIY Wire & Terminal Block**  
L-RGBWIRE25-1  
L-BS4PBL-1

Specifications:

Wattage	Lumens	Input Voltage	Diode Life	Max Per Power Supply 60W	Max Continuous Run	Mounting	Warranty	Beam Angle
4.4W/ft. (14.4W/m)	Red: 48 per ft. (157 per m) Green: 121 per ft. (397 per m) Blue: 35 per ft. (115 per m)	12VDC	50,000 Hours	13' (4 m)	13' (4 m)	Surface	5 Year	
<div><div>Blue 460 nmGreen 520 nmRed 630 nm</div><div>400450500550600650700750</div><div>Wavelength (nm)</div><div>Wavelengths are averages.</div></div>								



NEW!

# RGB Tunable FlexTape®

BALANCE

24VDC

4.4W/ft.  
(14.4W/m)

Red	Green	Blue
51 lumens per ft. (167 per meter)	117 lumens per ft. (384 per meter)	41 lumens per ft. (135 per meter)

120°

Tresco®'s RGB Balance FlexTape® goes the distance, with 16 million color variations and On-Board Constant Current Regulators creating consistent dramatic lighting is a reality. Created for high-end projects including residential, hospitality and commercial

### Why Balance

All tape lighting has inherent voltage drop. This voltage drop can cause color shift in longer runs of RGB. The On-Board Constant Current Regulators prevent this from happening resulting in balanced color from start to finish.

### Features:

120° beam angle

4.4W/ft.

Sold in 16.4' (5 m) roll

Cuttable every 3-1/4" (83 mm)

No soldering required – simple FlexConnect connectors (sold separately)

Precision tunable remote controls (sold separately)

### Typical Applications:

Under Cabinet

Interior Cabinets

Accent Lighting

Displays

Task Lighting

Store fixtures



Toe kick

Soffit

Backlighting



### Dimensions:

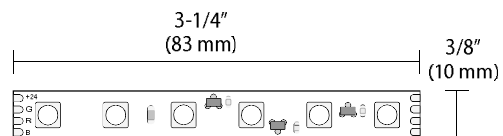

RGB Tunable FlexTape® can be used as a DIY option for flush and recessed Infinix. For other profiles, must be custom ordered.



Cuttable every  
3-1/4"  
(83 mm)



16 million color combinations




No soldering required – simple FlexConnect connectors (sold separately)








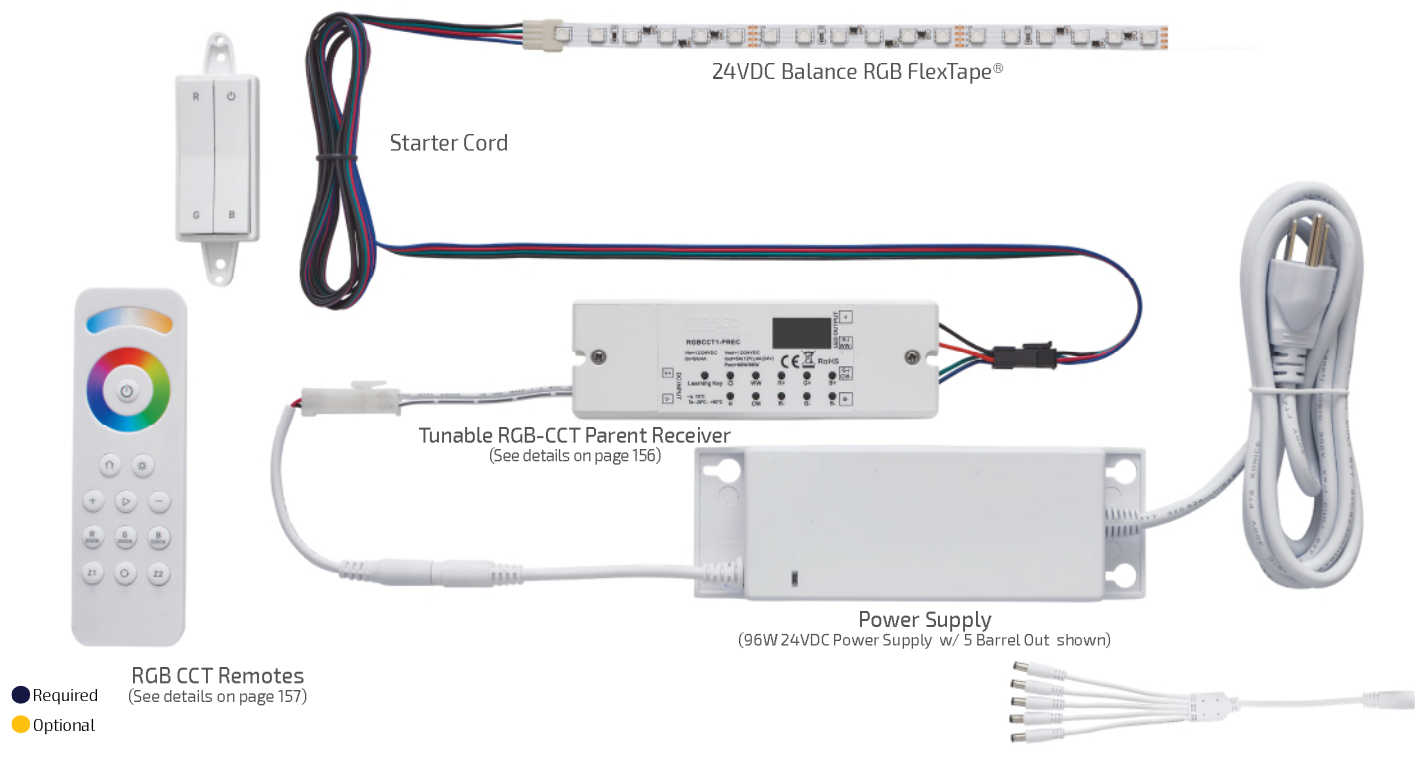



Strong 300 LSE 3M™ adhesive backing


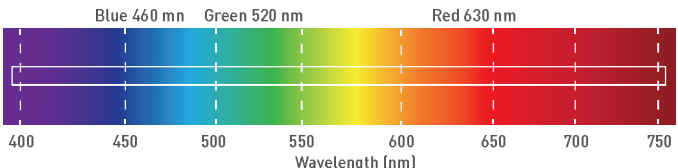
Typical Setup:



Accessories:

								
<b>Power Supplies</b> see power supply section	<b>RGB CCT Parent Receiver</b> L-RGBCCT1-PREC-1	<b>Starter Cord</b> L-TPEPKT-2M-RGB-1 L-TPEPKT-2IN-RGB-1	<b>RGB CCT Remotes</b> See page 157	<b>6 Output Adaptor</b> L-4P60-1	<b>RGB CCT Child Receiver</b> L-RGBCCT1-CREC-1	<b>Back-to-Back Connector</b> L-TPE-BTB-RGB-1	<b>Link Cord</b> L-TPELNK5-RGB-1 L-TPELNK15-RGB-1 L-TPELNK25-RGB-1 L-TPELNK60-RGB-1 L-TPELNK120-RGB-1 L-TPELNK180-RGB-1	<b>DIY Wire &amp; Terminal Block</b> L-RGBWIRE25-1 L-BS4PBL-1

Specifications:

Wattage	Lumens	Input Voltage	Diode Life	Max Per Power Supply 96W	Max Continuous Run	Mounting	Warranty	Beam Angle
4.4W/ft. (14.4W/m)	Red: 51 per ft. (167 per m) Green: 117 per ft. (384 per m) Blue: 41 per ft. (135 per m)	24VDC	50,000 Hours	21' (6.4 m)	16.4' (5 m)	Surface	5 Year	
 <p>Wavelengths are averages.</p>								