DOOR STORAGE SHELF SYSTEMS INSTALLATION INSTRUCTIONS INSTRUCCIONES DE INSTALACIÓN DE ESTANTES PARA ALMACENAMIENTO EN PUERTAS NOTICE D'INSTALLATION DE LA ÉTAGÈRE MONTÉE SUR PORTE









INSTALLATION INSTRUCTIONS for POLYMER DOOR STORAGE SHELF SYSTEMS

SHELF SIZE SELECTION

Select the best size RAS Door Storage shelf for the application from the CHART below.

Minimum Cabinet Frame	Rev-A-Shelf Width-Inches		
Opening - Inches			
8 3/8"	7 1/8"		
14 1/4"	13 ¾"		
20 1/4"	19 ¾"		

NOTE: The cabinet opening should be at least ½" wider than each shelf size to ensure adequate side clearance.

SHELF STANDARD LENGTH SELECTION

Select the longest shelf standard length that will fit on the cabinet door and still provide clearance inside the cabinet face frame opening. This will allow for strongest mounting and greatest flexibility in determining the number of shelves and shelf position. Standards can be trimmed if required.

FOUR SHELF STANDARD LENGTHS AVAILABLE REFER TO CHART A

C	Н	A	R	T	Α

CHAINTA		<u> </u>
Nominal	Actual	Minimum
Standard	Standard	Vertical
Length	Length	Cabinet Opening
6232-26-4528-52	25 %"	26 1/8"
6232-58-4528-52	57 1/8"	58 1/8"

Mount the shelf standards on the cabinet door using the spacing dimensions from CHART B. Drill holes %" maximum depth.

CHART B

Spacing dimensions for shelf standards. SELECT SPACING A, B, C, D, AS NEEDED.

CHARIB	SELECT SPACING A, B, C, D, AS NEEDED.				
Shelf Width	Α	В	С	D	
(Inches)					
7 1/8"	7"	6 3/16"	5 3/8"	¹³ /16"	
13 ¾"	12 1/8"	12 1/16"	11 1/4"	¹³ / ₁₆ "	
19 3/4"	18 %"	18 1/4"	17 1/4"	13/16"	



NOTE: If the shelf standards are to be mounted on the top and bottom of the door frames (panel door) the standard should be long enough to extend ³/₄" onto these frame members to accept a screw.





MOUNTING THE SHELF STANDARDS:

- Determine the spacing of the standards by inserting clips at the top and bottom on a pair of standards and placing the shelves into the appropriot pocket. (Any combination of pockets on the back of the door shelf may be used to provide spacing combinations which are the most appropriate for your door style).
- 2. Mark the mounting screw positions by placing the assembly made in (Step no. 1) above, in the desired position. Insure that the shelves are level before installing the mounting screws. CAUTION: If pre-drilling holes do not exceed 7/16" deep to insure that screws will not break through or otherwise mar the outer surface of the door or installed unit. (use 7/64" dia. drill for hardwood and 3/32" dia. drill for softwood).
- Additional clamps are furnished which can be used for door frame strain relief as noted. They also allow re-positioning mounting screws either "outside "or" in side" the shelf standards (whichever provides the most wood screw).

Two shelf clips are required to suppport each shelf. These may be positioned as desired using various combinations of pockets in the shelf standards. **NOTE:**

SHELF STANDARDS MAY BE CUT TO SHORTER LENGTHS BY USING A FINE BLADED HACKSAW.

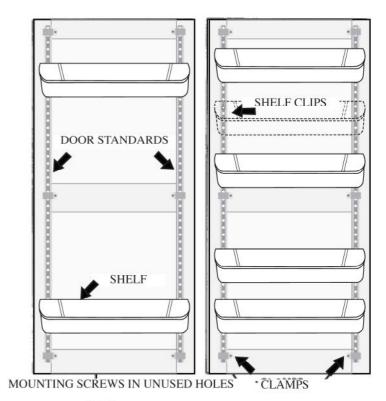



INSTALLING THE SHELF CLIPS AND DOOR SHELVES:

- Insert the shelf clip crosswise in the shelf standard, with the boss on the clip in the selected hole, and rotate ¼ turn until the clip snaps into a verticle position. To remove or relocate a clip rotate it to a horizontal position and remove-
- To install the door shelf on the clips hook the pockets in the back of the shelf over the two clips and press down on the rear of the shelf until it locks on the clips. The shelves are now ready for loading.
- 3. To remove or relocate a shelf release the shelf from the clips by pulling the two clip levers forward (toward the shelf front). Lift the shelf up and off the clips:
- Reposition the two shelf clips as described in (Step no. 1) above, and reinstall the door shelf.

