




Hall Tree CF6030

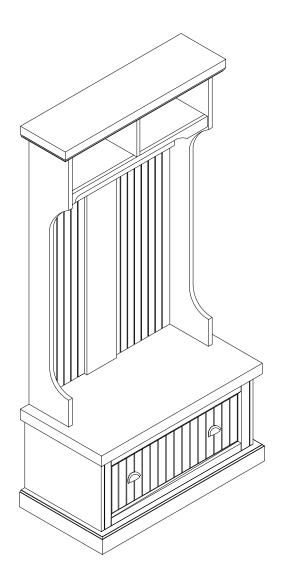

PART LIST

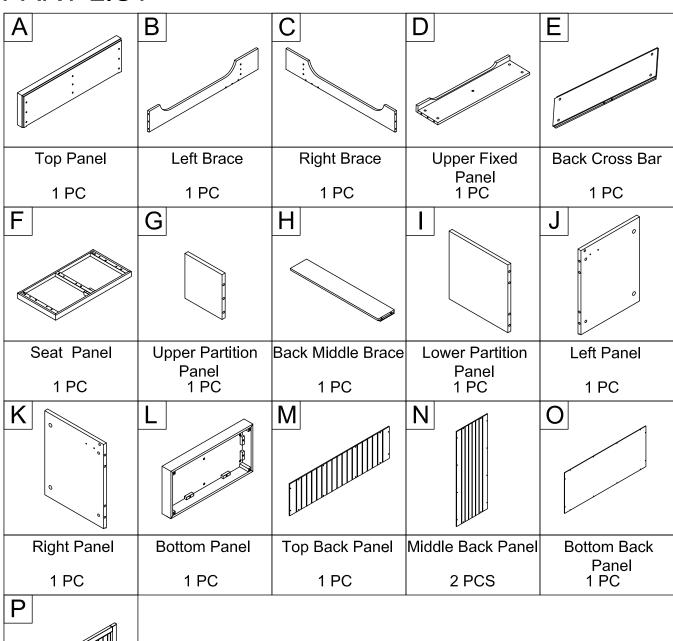



HARDWARE LIST

#1	#2	#3	#4	#5	
Ø8*30mm				1/4"*Ø5/32"	
Wood Dowel	Hook	Bronze Screw	Handle	Round Head Bolt	
30 PCS (Extra 1)	3 PCS	6 PCS	2 PCS	4 PCS	
#6	#7	#8	#9	#10	
Cam Bolt	Cam Lock	Magnot	Round Head	2"*Ø1/4"*D11mm Bolt	
Calli Buit	Calli Lock	Magnet	Screw		
14 PCS	14 PCS (Extra 1)	1 PC	2 PCS (Extra 1)	14 PCS	
#11	#12	#13	#14	#15	
				(8) Managaman	
Barrel Nut	Allen Wrench	Left Hinge	Right Hinge	Short Screw	
6 PCS	1 PC	1 PC	1 PC	6 PCS	
#16		#18	#19	#20	
		VIIII (S)			
	Right Safety Hinge	Long Screw	Screw	Safety Strap Kit	
1 PC	1 PC	8 PCS	48 PCS (Extra 1)	1 SET	

ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.



Phillips Head Screwdriver


Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

Step 1. Attach hinges (parts #13 & #14) to door panel (part P) using short screws (part #15) and phillips head screwdriver. Attach handles (part #4) to door panel (part P) using round head bolts (part #5) and phillips head screwdriver. Attached hooks (part #2) to back cross bar (part E) using bronze screws (part #3) and phillips head screwdriver.

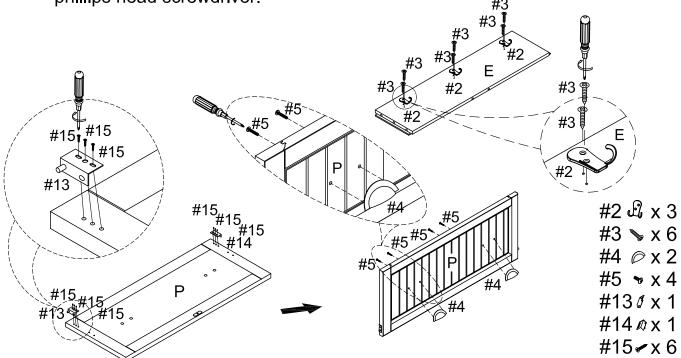


Step 2. Attach magnet (part #8) to seat panel (part F) using round head screws (part #9) and phillips head screwdriver. Attach cam bolts (part #6) to seat panel (part F) and braces (parts B & C) using phillips head screwdriver.

NOTE: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

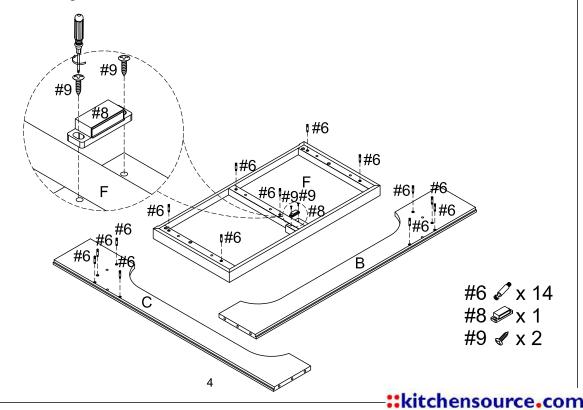


1.800.667.8721

Step 3. Attach upper fixed panel (part D) to right brace (part C) using wood dowel (part #1) and cam locks (part #7).

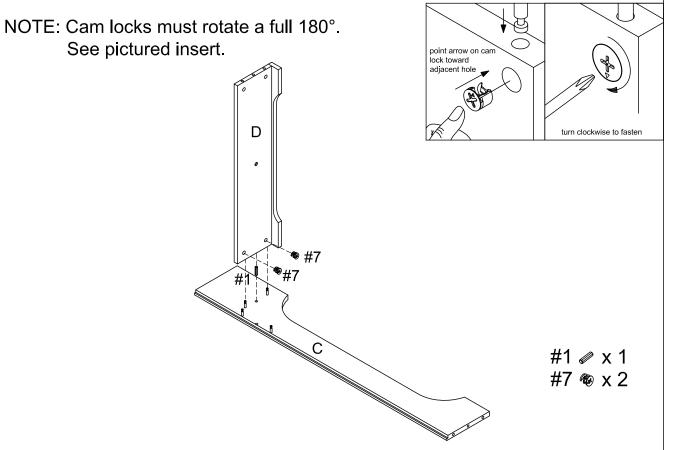



Step 4. Attach back cross bar (part E) to right brace (part C) using wood dowel (part #1) and cam locks (part #7).

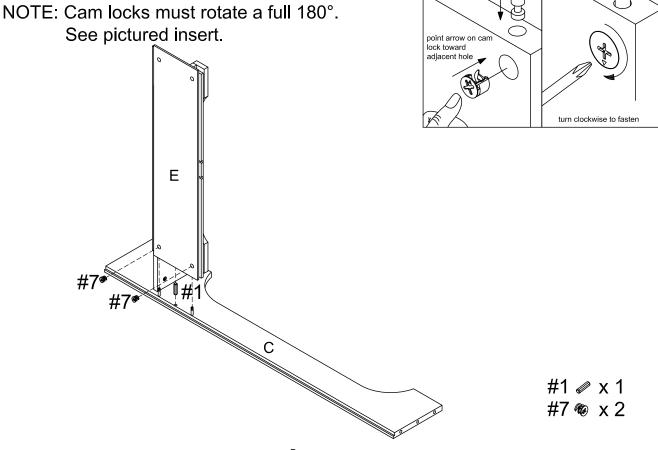

Step 5. Attach left brace (part B) to assembled unit (parts D & E) using wood dowels (part #1) and cam locks (part #7).

NOTE: Cam locks must rotate a full 180°. See pictured insert.

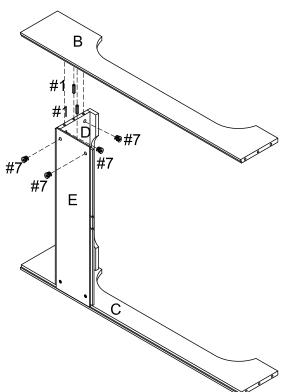




point arrow on ca


lock toward

Step 6. Attach top panel (part A) and upper partition panel (part G) to assembled unit (parts B, C & D) using wood dowels (part #1), bolts (part #10) and allen wrench (part #12).


NOTE: Cam locks must rotate a full 180°. See pictured insert.

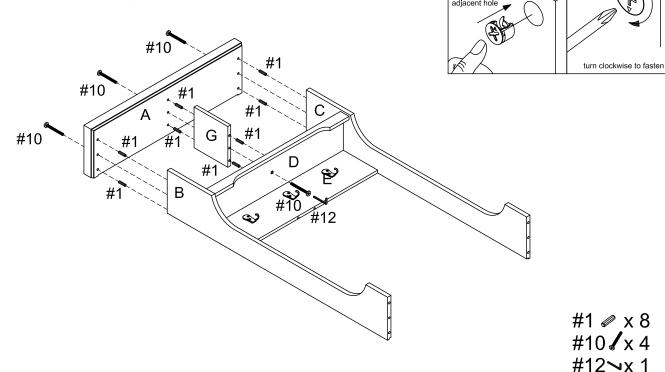


Step 7. Attach seat panel (part F) and back middle brace (part H) to assembled unit (parts B, C & E) using wood dowels (part #1), bolts (part #10) and allen wrench (part #12).

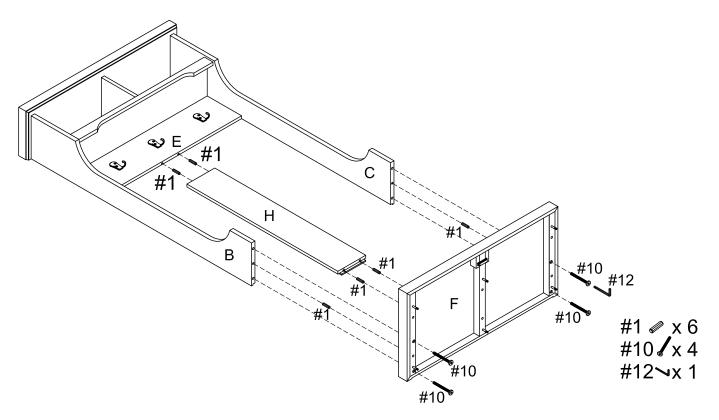


Step 8. Attach lower partition panel (part I) and panels (parts J & K) to seat panel (part F) using wood dowels (part #1) and cam locks (part #7).

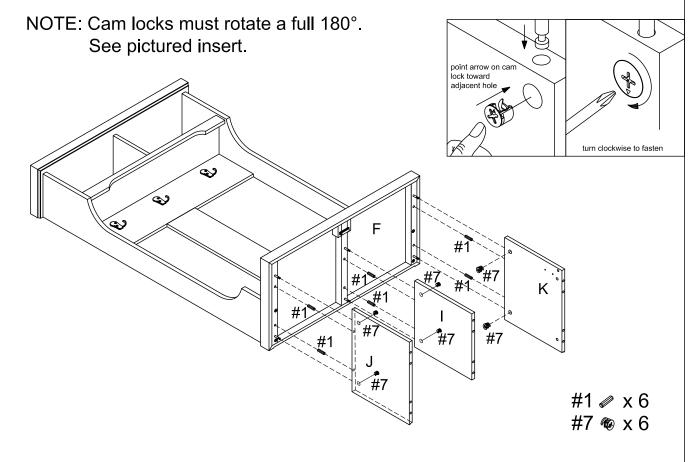

Step 9. Attach door panel (part P) by placing hinges in the pre-drilled holes of panels (parts J & K).

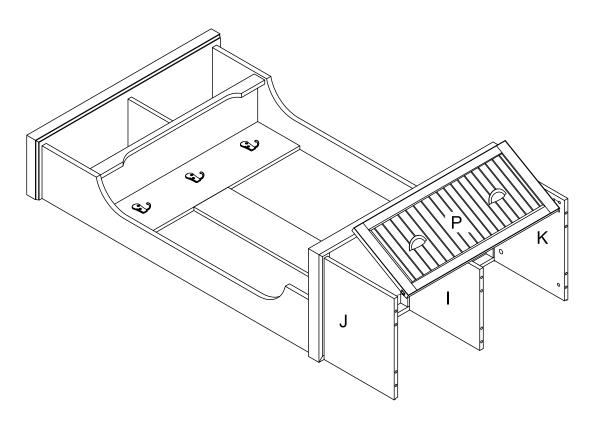


Step 10. Attach bottom panel (part L) to assembled unit (parts I, J & K) using wood dowels (part #1), bolts (part #10), barrel nuts (part #11) and allen wrench

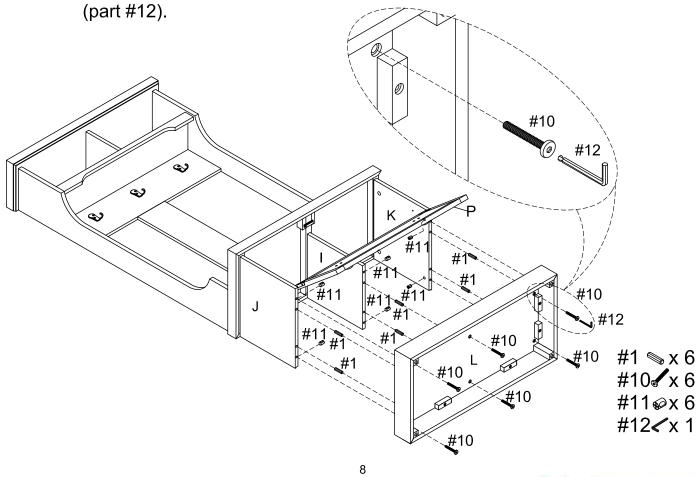

::kitchensource.com


1.800.667.8721

Step 11. Carefully turn unit upright. Attach back panels (parts M, N & O) to assembled unit (parts A, B, C, E, F, H, J, K & L) using screws (part #19) and phillips head screwdriver.

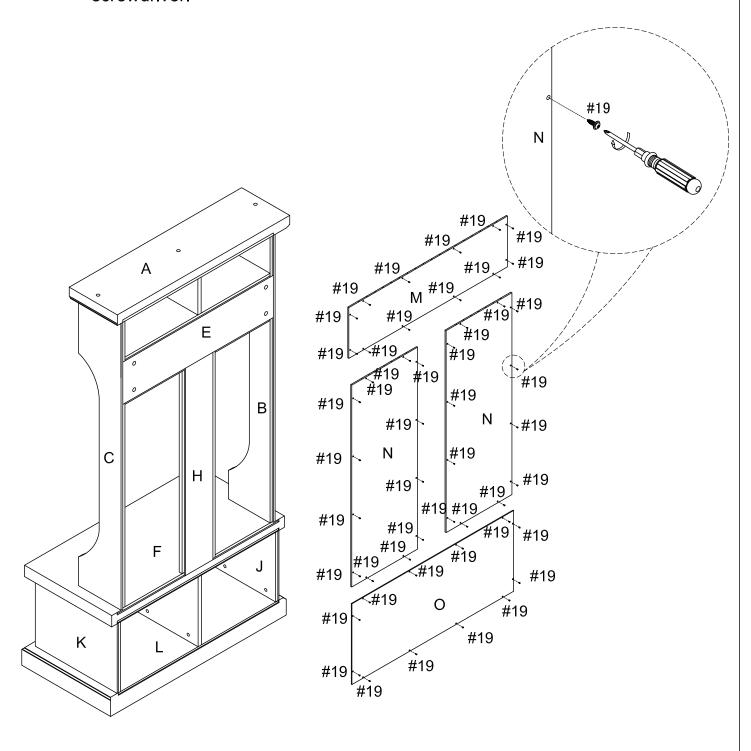

Step 12. Attach safety hinges (parts #16 & #17) to panels (parts J & K) and door panel (part P) using long screws (part #18) and phillips head screwdriver.

Important: Safety strap kit (part #20) must be installed to prevent tipping, damage and/or injury.

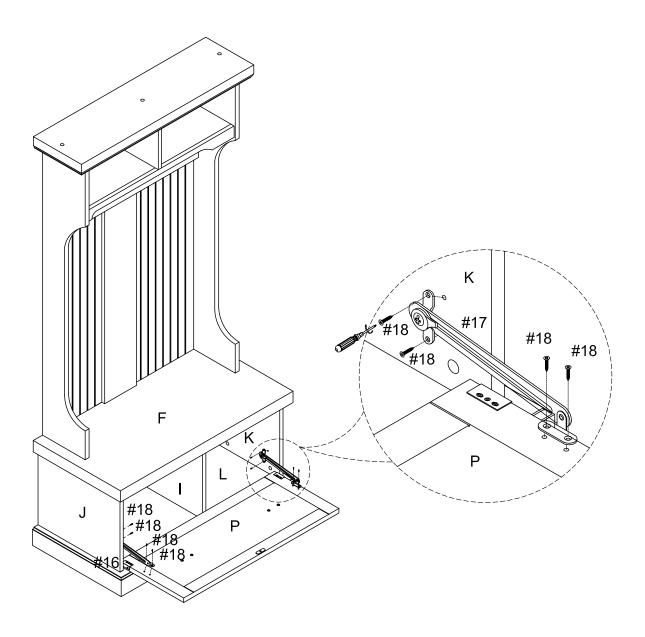

#16\x 1 #17\x 1 #18\sqrt x 8

#20	Α	В	С	D	E
			D8*3/4"	D8*1-1/2"	
Safety Strap Kit	Wa ll Anchor	Washer	Short Screw	Long Screw	Safety Wall Strap
1 SET	1 PC	2 PCS	1 PC	1 PC	1 PC

SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

- 1.Insert short screw (C) through washer (B) and safety wall strap (E) and attach to top panel (part A) using phillips head screwdriver.
- 2.Drill a 11/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in top panel (part A) where the safety wall strap (E) is attached. Tap wall anchor (A) into the hole.
- 3.Insert long screw (D) through washer (B) and safety wall strap (E) into wall anchor (A) using phillips head screwdriver.

