Air King Ventilation Products®

SPECIFICATIONS

ESVAL SERIES

RANGE HOODS

ENERGY STAR® Valencia Series Wall Mounted Range Hood

- **Dimensions**
  Overall bottom projection - 19.69"
  Height -9.25"
  Widths: 30" and 36"
- **Body**
  Stainless Steel
- **Lighting**
  Electronic Quick Start Ballast – Use Triple 4 pin PL lamp, maximum 26 Watts.
- **Ducting**
  Vertical ducting: 6" round ducting with all metal outlet adapter and back draft damper
- **Mounting**
  Wall mounted. Install 20" to 30" from cooking surface.
- **Filters**
  Dishwasher safe, aluminum mesh grease filters (included).
- **Blower**
  3 speed, permanently split capacitor motor. Rated 120 volts,60 hz. with a dual inlet, electronically balanced polymetric centrifugal blower wheel

  PERFORMANCE: High - 300 CFM @ 4.0 Sones, HVI Certified
  Medium (Normal Operating Speed) - 200 CFM @ 2.0 Sones, HVI Certified
  Low - 90 CFM @ 0.8 Sones, HVI Certified

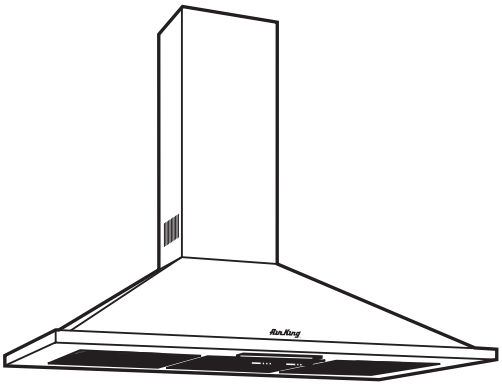

MODEL	CFM HIGH/MED/LOW	SONES HIGH/MED/LOW	LIGHTING	DUCT SIZE	WIDTH	HEIGHT	DEPTH
ESVAL30S	300/200/90	4.0/2.0/0.8	26W Fluorescent	6" round	30"	31"-51"	19.69"
ESVAL36S	300/200/90	4.0/2.0/0.8	26W Fluorescent	6" round	36"	31"-51"	19.69"

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

ENERGY STAR

2100 HVI CERTIFIED™