

22-1/8" Depth, 10" High	MODEL
<ul style="list-style-type: none"> ◆ 635± CFM ◆ 7" Round Duct 	<p>C2030PSB-SS C2036PSB-SS C2042PSB-SS C2048PSB-SS</p>
<ul style="list-style-type: none"> ◆ 765± CFM ◆ 8" Round Transition 	<p>C2030PSB-8-SS C2036PSB-8-SS C2042PSB-8-SS C2048PSB-8-SS</p>
<ul style="list-style-type: none"> ◆ 850± CFM ◆ 10" Round Transition 	<p>C2030PSB-K-SS C2036PSB-K-SS C2042PSB-K-SS C2048PSB-K-SS</p>
<ul style="list-style-type: none"> ◆ 1080± CFM ◆ Two 7" Round Ducts 	<p>C2036PS1-TWB-SS C2042PS1-TWB-SS C2048PS1-TWB-SS C2054PS1-TWB-SS C2060PS1-TWB-SS</p>
<ul style="list-style-type: none"> ◆ 1290± CFM . ◆ Two 8" Round Transitions 	<p>C2036PS1-TWB-8-SS C2042PS1-TWB-8-SS C2048PS1-TWB-8-SS C2054PS1-TWB-8-SS C2060PS1-TWB-8-SS</p>
18-1/8" Depth, 10" High	MODEL
<ul style="list-style-type: none"> ◆ 540± CFM ◆ 7" Round Duct, 4.25" Off Center 	<p>C2030BP1B-SS C2036BP1B-SS C2042BP1B-SS</p>
<ul style="list-style-type: none"> ◆ 625± CFM ◆ 7" Round Duct 	<p>C2030BPB-SS C2036BPB-SS C2042BPB-SS C2048BPB-SS</p>
<ul style="list-style-type: none"> ◆ 750± CFM ◆ 8" Round Transition 	<p>C2030BPB-8-SS C2036BPB-8-SS C2042BPB-8-SS C2048BPB-8-SS</p>
<ul style="list-style-type: none"> ◆ 840± CFM ◆ 10" Round Transition 	<p>C2030BPB-K-SS C2036BPB-K-SS C2042BPB-K-SS C2048BPB-K-SS</p>
<ul style="list-style-type: none"> ◆ 1065± CFM ◆ Two 7" Round Ducts 	<p>C2036BP1-TWB-SS C2042BP1-TWB-SS C2048BP1-TWB-SS C2054BP1-TWB-SS C2060BP1-TWB-SS</p>
<ul style="list-style-type: none"> ◆ 1275± ◆ Two 8" Round Transitions 	<p>C2036BP1-TWB-8-SS C2042BP1-TWB-8-SS C2048BP1-TWB-8-SS C2054BP1-TWB-8-SS C2060BP1-TWB-8-SS</p>



C2000 Baffle Series

FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffles
- ◆ Front Panel Lighting: LED bulbs Included.
30" to 48" Hoods take 2 Bulbs (1 Set)
54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- ◆ Transition, see accessories.
- ◆ Remote wiring, see accessories.

NO Performance Warranty over BBQ Grills/Griddles.

TRANSITION


Example: C2036PSB-8
Vent Size 8" Round x 3-1/2" High

Example: C2042BPB-K
Vent Size 10" Round x 7" High




Ventilator Insert With Baffles, Specifications

C2000PSB Baffle Series

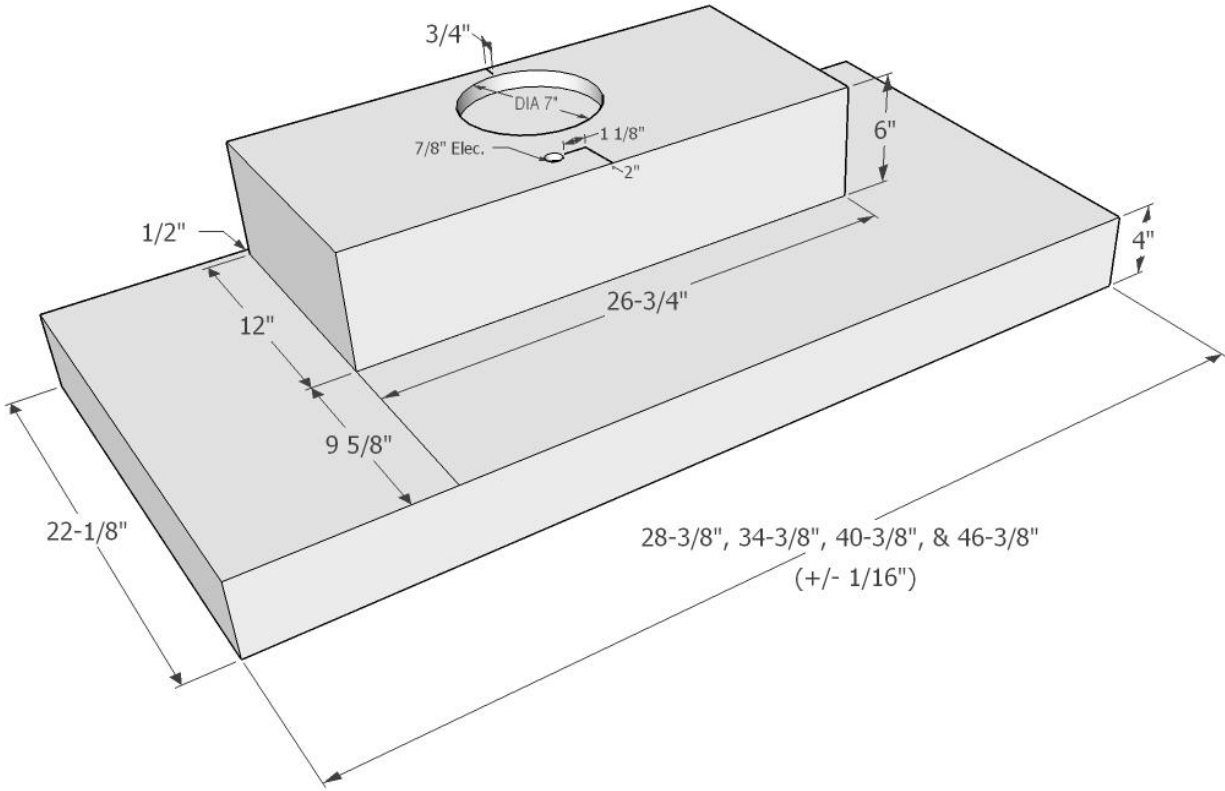

8" Transition
8" Round x 3-1/2" high




10" Transition
10" Round x 7-1/2" high

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

Ventilator Insert With Baffles, Specifications

C2036PS1-TWB Baffle Series

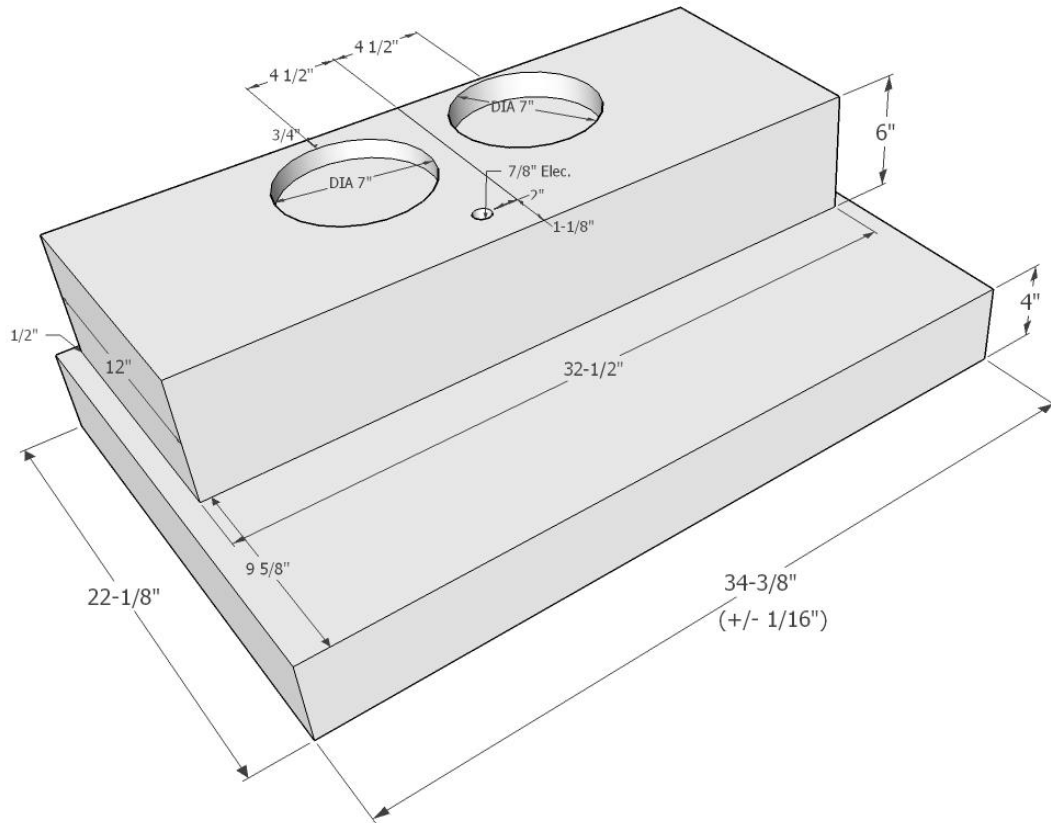


8" Transition
8" Round x 3-1/2" high

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

Ventilator Insert With Baffles, Specifications

C2042PS1-TWB - C2060PS1-TWB Baffle Series

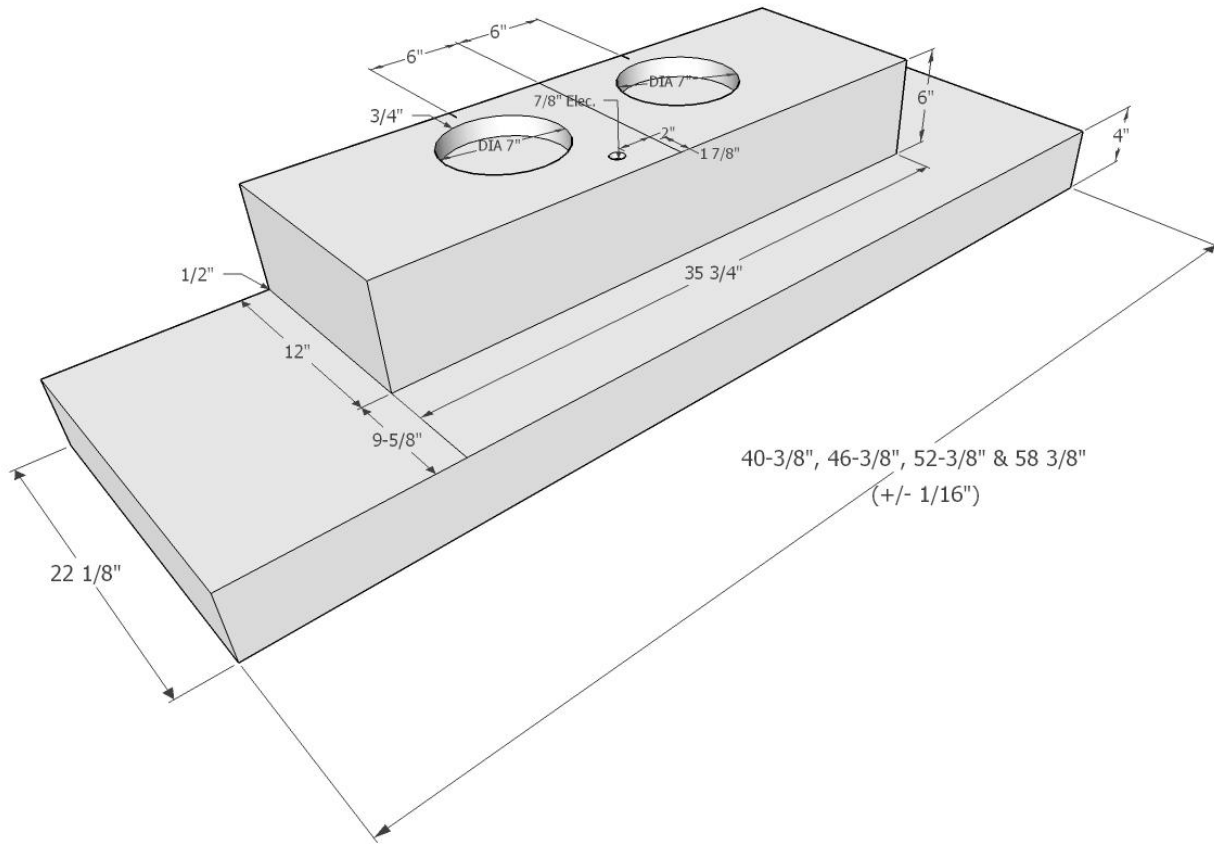


8" Transition
8" Round x 3-1/2" high

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!
All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

Ventilator Insert With Baffles, Specifications

C2000BPB Baffle Series

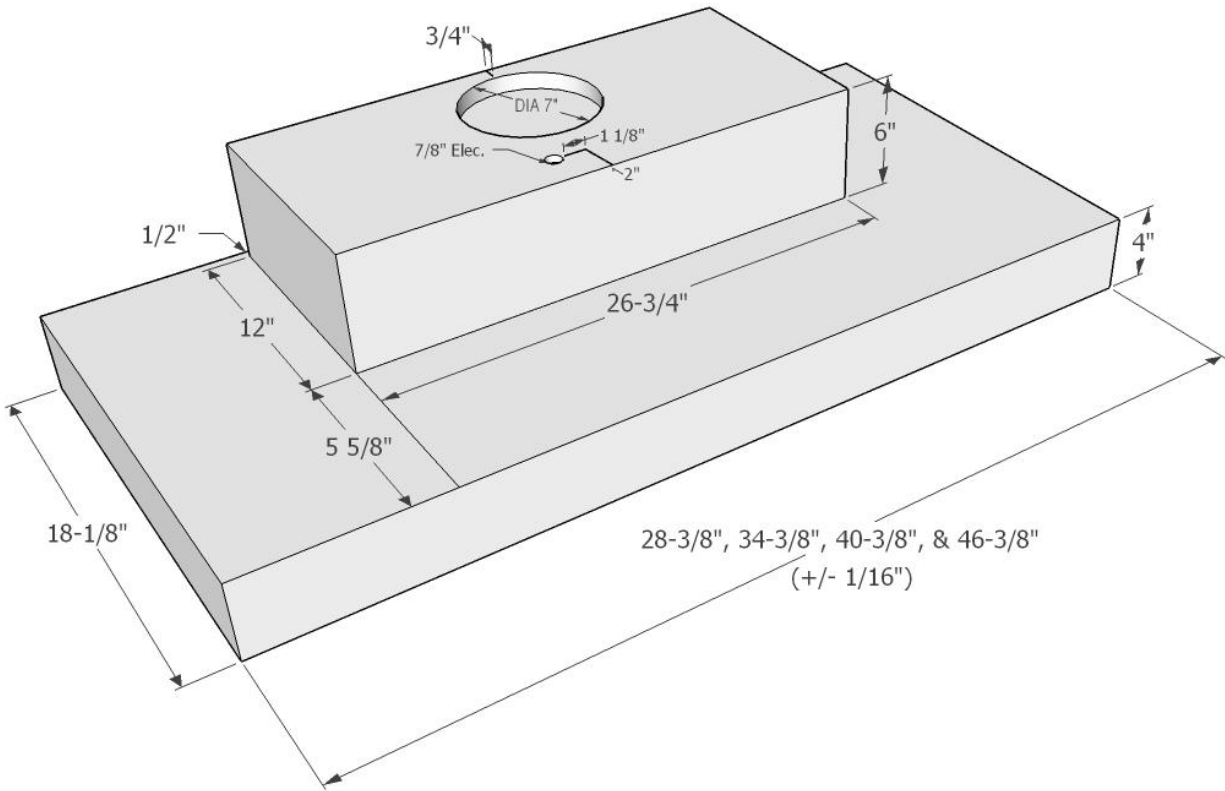

8" Transition
8" Round x 3-1/2" high




10" Transition
10" Round x 7-1/2" high

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!
All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

Ventilator Insert With Baffles, Specifications

C2036BP1-TWB Baffle Series

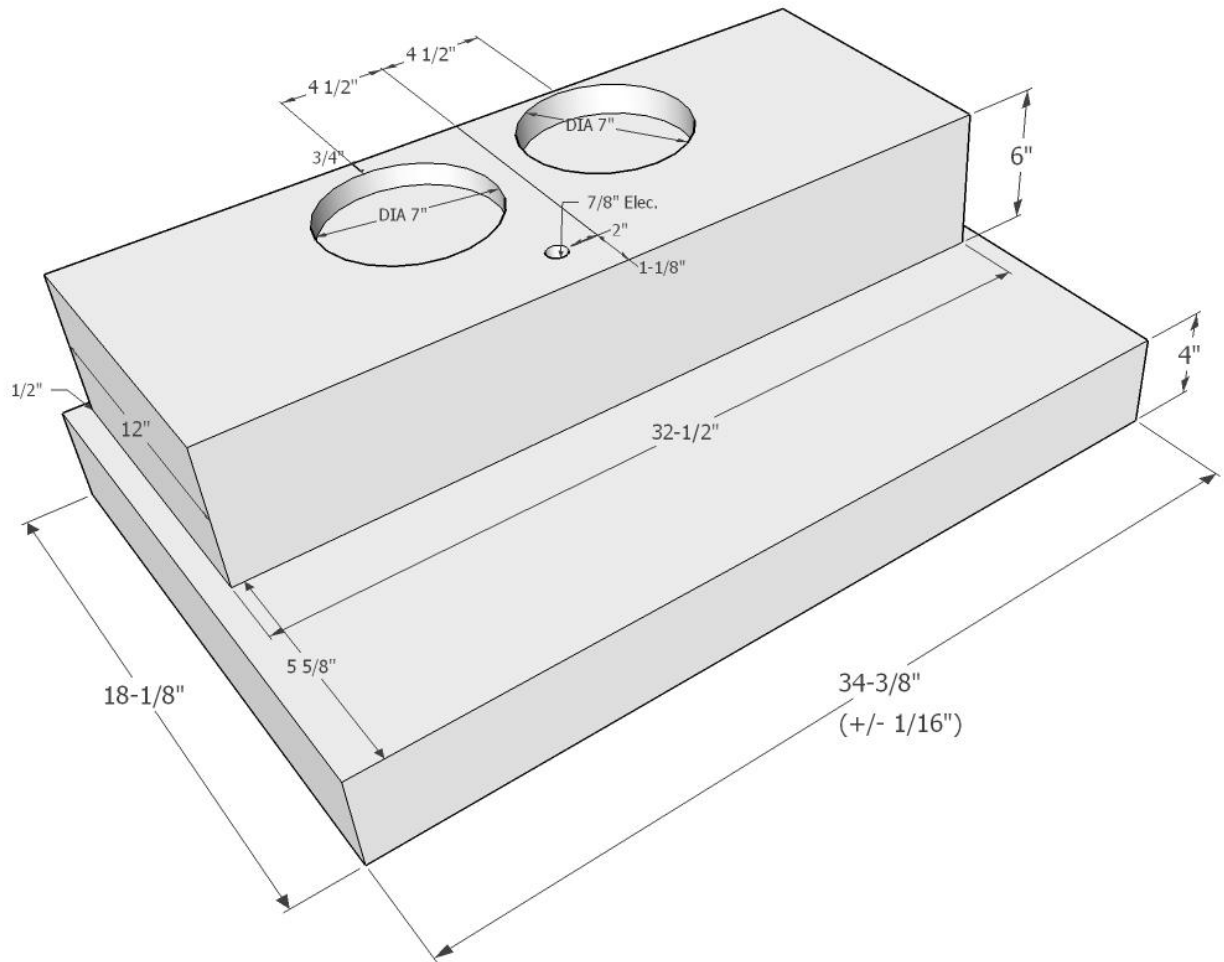

8" Transition
8" Round x 3-1/2" high

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

