



# Enclume

## 8-Tier Cookware Stand Knock Down Version CWS8kd

Thank you for selecting Enclume.  
You will not be disappointed.  
Enclume is the No. 1 brand in pot racks and  
You now own one of the finest racks made.

### WARNING:

**READ ALL OF THESE INSTRUCTIONS BEFORE  
ASSEMBLING AND USING YOUR RACK.**

FINISHED PRODUCT IN USE

Enclosed you will find everything needed for the assembly and use of your storage rack. **Two people are highly recommended for assembly** and make this process much easier and less frustrating,

The parts and hardware included are:


#### Hardware included:

- 24 – Barrel Bolt – #10 x 24 x 7/16"
- 24 – Barrel Screw – #10 x 24 x 5/16"
- 3 – Felt Pads
- 2 – 5/32" Hex Key Wrenches

#### Components included:

- 3 – Uprights
- 8 – Shelf Sets (numbered 1 - 8);  
Each set contains 3 shelf pieces for a total 24 pieces

ASSEMBLY POSITION  
At Step 6) Completion

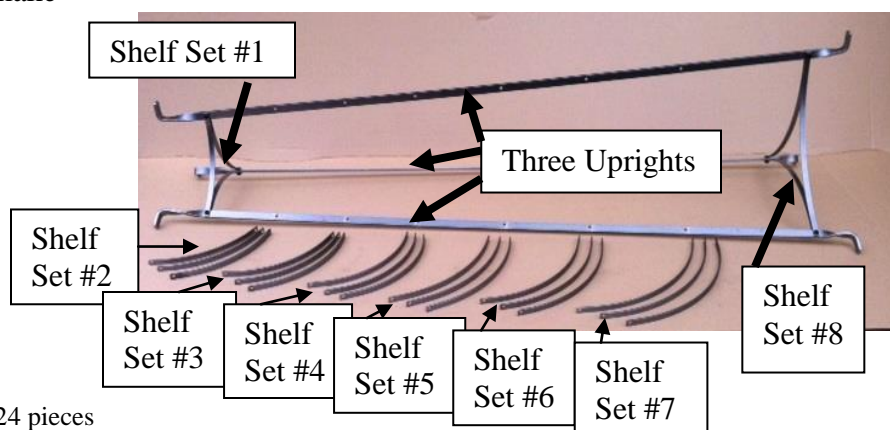

## ASSEMBLY INSTRUCTIONS

- 1) Unpack the rack box, layout the contents, and match them to the hardware and component lists above
- 2) Place two of the three uprights on a firm surface with what will be the lower ends of the uprights (marked with a small piece of masking tape) extending to your right
- 3) Locate **Shelf Set #8** (set of three), the largest and bottom layer of shelves. Using two of the three shelf pieces, attach the two shelf pieces to an upright by inserting the **barrel screws and bolts** as follows:
  - a) First through the hole in one end of shelf piece,
  - b) Then through the lowest hole in the upright, and then
  - c) Through the hole in the other shelf.

Connect the two shelf pieces surrounding the upright by inserting a **barrel screw and bolt**, making sure the upright is between the two shelves. You may use both hex wrenches to tighten this connection, but please, **do not fully tighten at this time**.

**NOTE: You will be revisiting the process of this instruction 3) with other shelf sets.**

- 4) Using the third shelf piece from the Shelf Set you are working with, repeat Step 3) to connect the two remaining open shelf pieces to the second upright.

**\*\* PLEASE TURN THIS INSTRUCTION OVER \*\***

## **ASSEMBLY INSTRUCTIONS, continued**

- 5) Locate the third upright, make sure the marked lower end is to the right, and then connect this upright to the remaining two open shelf pieces with the barrel screws and bolts, as in Steps 3) and 4).
- 6) Locate **Shelf Set #1**, move to the far left of your rack, and repeat steps 3)-5) to install the highest (and smallest) shelf layer to at the top of your cookware stand.
- 7) Your cookware stand can now be stood up, so you have the option of finishing assembly with the stand lying down or upright, whichever is the easiest for you and your partner to work from.
- 8) Repeat Steps 3 – 5 to connect the remaining **six Shelf Sets (sets 2-7)** to the three uprights.
- 9) Place the assembled rack upright on a level surface and using the two hex wrenches, tighten the **TOP** shelves first, then the **BOTTOM** shelf, then square up the stand and securely tighten all barrel screws and bolts on the remaining six shelves.
- 10) Apply the enclosed felt pads to the underside of the bottom tab of each of the three uprights.

## **USE INSTRUCTIONS**

- 1) Take care to place your cookware rack on a solid, level surface in an area out of the way from foot traffic.
- 2) Place heavier pots on the lower shelves and avoid over-loading top shelves to create a possible top-heavy condition and rack instability.
- 3) Enclume's hammered steel racks are finished with an industrial wax which is designed to provide years of protection to your cookware stand. Cleaning is easily done with a damp cloth, and dry thoroughly after cleaning. If a touch-up is ever needed a commercial wax product is recommended.

---

### **Warning**

---

**It is important that your rack is assembled correctly. If assembled or used incorrectly, it could become unstable and collapse, possibly causing injury.**

**Limited Warranty:** This product is warranted to be free of defects in material or workmanship for a period of five years from the date of your purchase. Your exclusive remedy shall be the repair or replacement of the defective product, and shall be subject to the following conditions: (1) you provide notice of any defect to Enclume within the warranty period, and (2) you return the defective product to Enclume Design Products, Inc. ( 24 Colwell St., Port Hadlock, WA 98339), *postage prepaid* within 20 days of obtaining a return authorization number from Enclume (which may be obtained by telephoning the number at the bottom of this instructions). There are no other warranties, expressed or implied, applicable to this product. **THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ENCLUME SPECIFICALLY DISCLAIMS ALL INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE PURCHASE OR USE OF THIS PRODUCT.**

**If you need help, please call 1-877-362-5863**



**Enclume Design Products, Inc.**  
24 Colwell Street, Port Hadlock, WA 98339  
Phone 360-385-6100 • Fax 360-385-6156  
[www.enclume.com](http://www.enclume.com)