


Chest

IMPORTANT


Carefully remove all the parts from the carton and place them individually on a soft cloth to prevent scratches or other damage.

Carefully and strictly follow these assembly instructions to ensure a completed product as designed.

Do not use power tools above 8 volts to assemble.

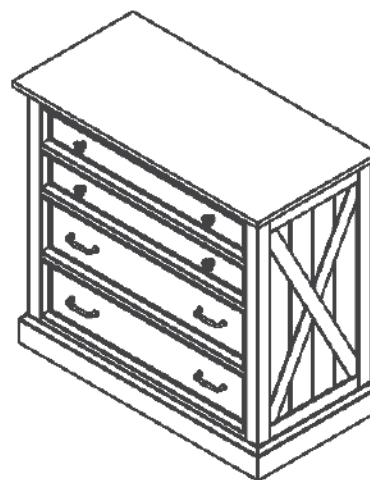


Part List

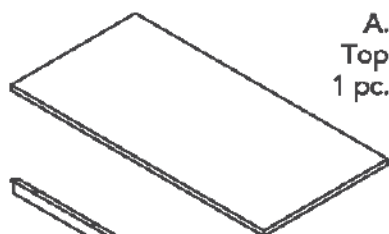


A.
Top
1 pc.



D.
Front Rail
1 pc.




B.
Side Panel
1 pc.




C.
Side Panel
1 pc.




E.
Front Rail
3 pcs.




H.
Back Panel
2 pcs.




F.
Front Rail
1 pc.

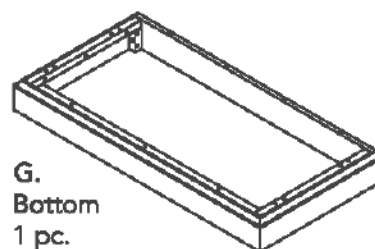


G.
Bottom
1 pc.



I.
Drawer
1 pc.



J.
Drawer
1 pc.



K.
Drawer
2 pcs.

Refer to later page(s) of these instructions for drawer assembly.

Hardware List



Cam Lock Screw
34 pcs. (+4 extra)



Cam Lock
34 pcs. (+4 extra)



M4x45
1 3/4" Round Head Screw
4 pcs. (+1 extra)



M4x32
1 1/4" Round Head Screw
7 pcs. (+1 extra)



M3x32
1 1/4" Flat Head Screw
64 pcs. (+1 extra)



M3x19
3/4" Flat Head Screw
28 pcs. (+1 extra)



M4x22
Machine Screw
12 pcs.



Knob
4 pcs.



Handle
4 pcs.



Wooden Dowel
6 pcs. (+1 extra)

Tool(s) required for assembly: Phillips screwdriver, Level, Pencil, Drill (8 volts or less), 3/8" Drill Bit


Assembly Instructions 2/11

IMPORTANT

- Use a soft cloth between these parts and the floor.
- Do not use power tools above 8 volts to assemble.
- Do not tighten all the screws until each part is properly assembled.
- The unit must be level to work properly. Use the included adjustable levelers to level.

STEP 1

Insert Cam Lock Screws into pre-drilled holes in Top (A), Side Panels (B), (C) and Back Panels (H), then tighten.

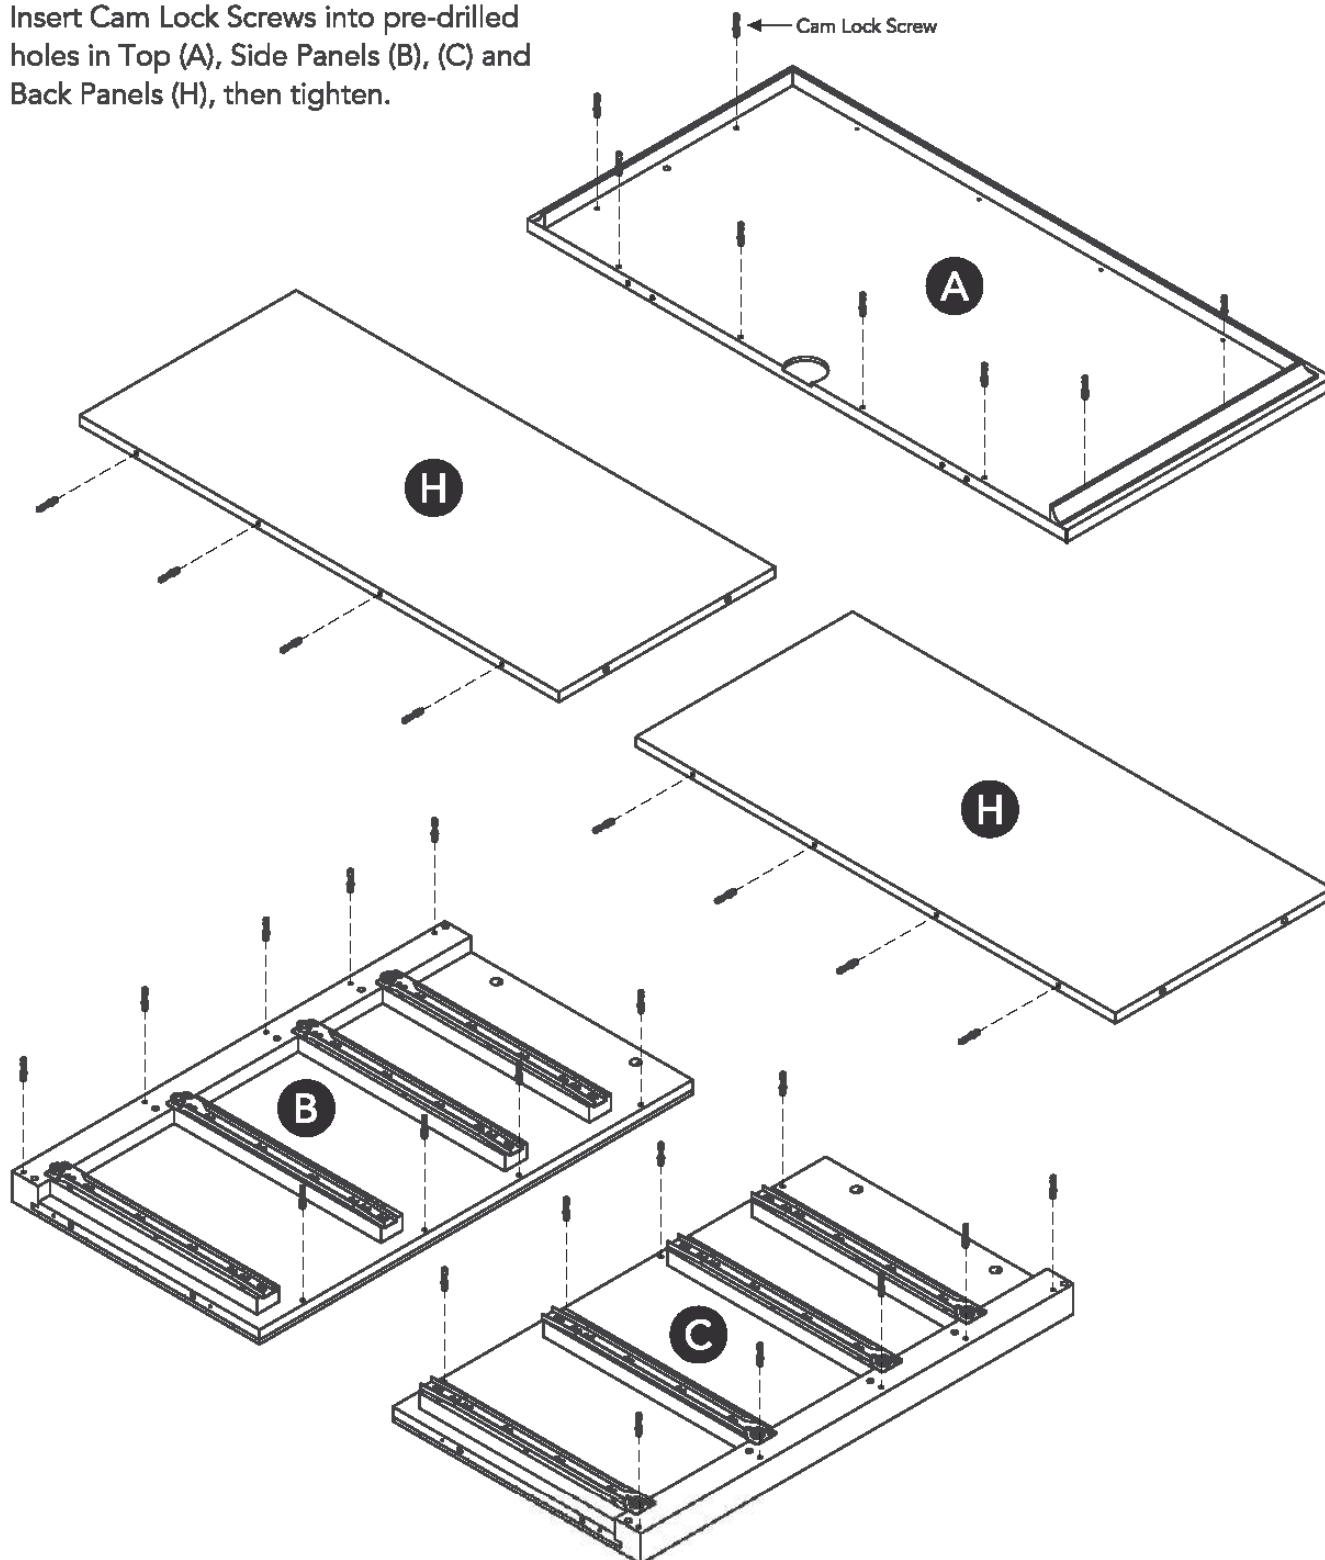

STEP 2

Assemble Back Panels (H) with Cam Locks.
(See Figure 1)



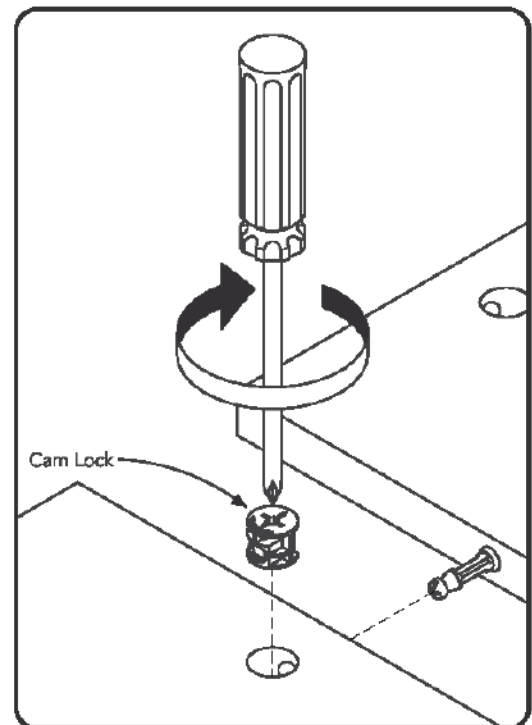


Figure 1

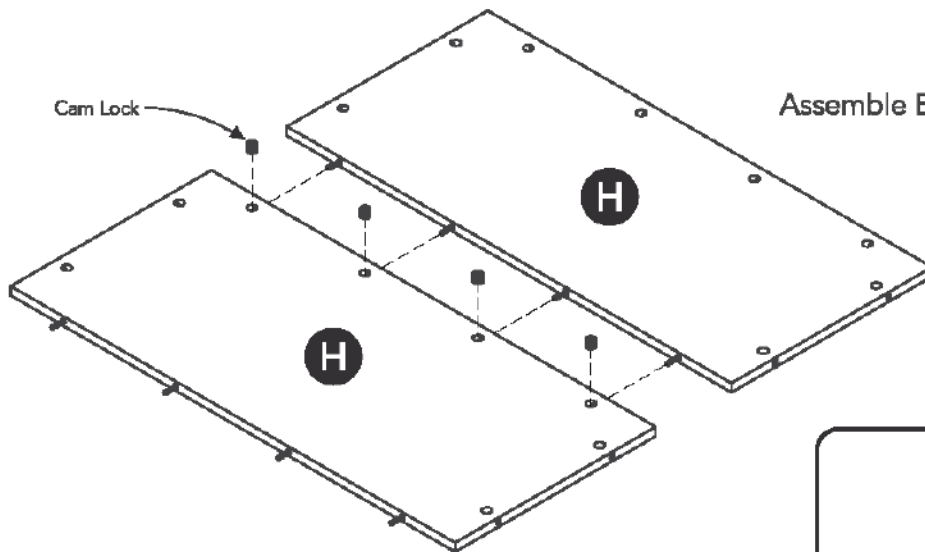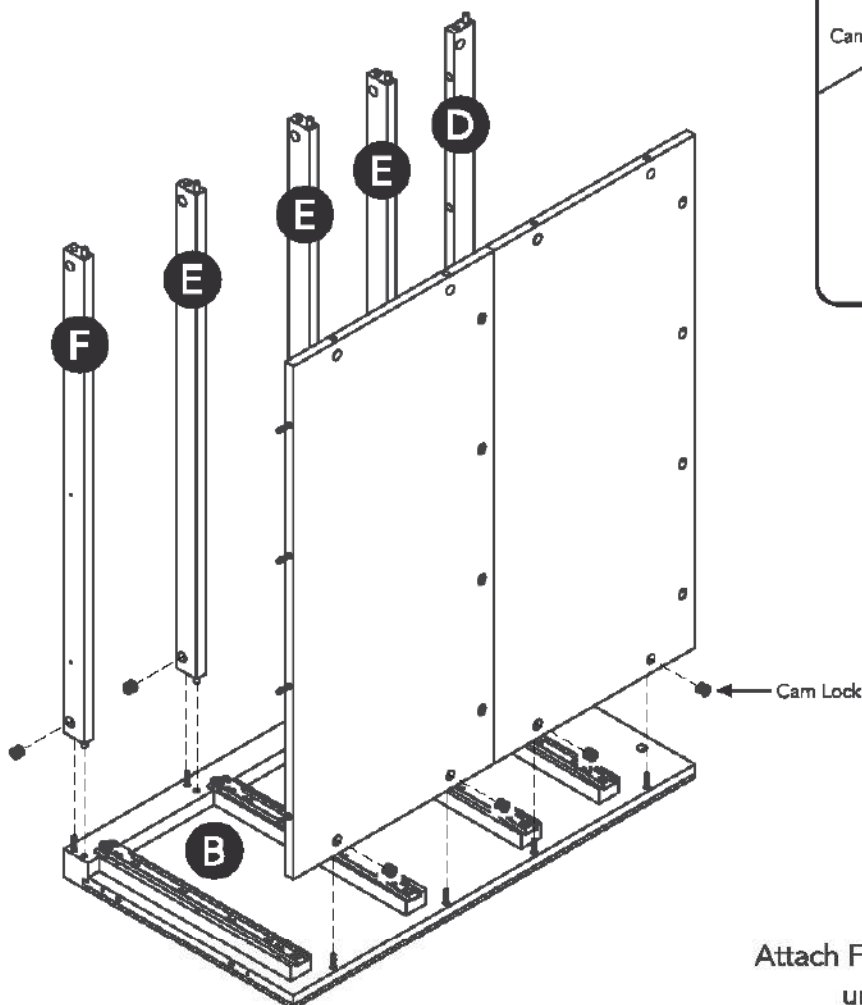


STEP 3

Attach Front Rails (D), (E), (F) and back panel unit to Side Panel (B) with Cam Locks.


STEP 4

Attach Side Panel (C) to unit with Cam Locks.

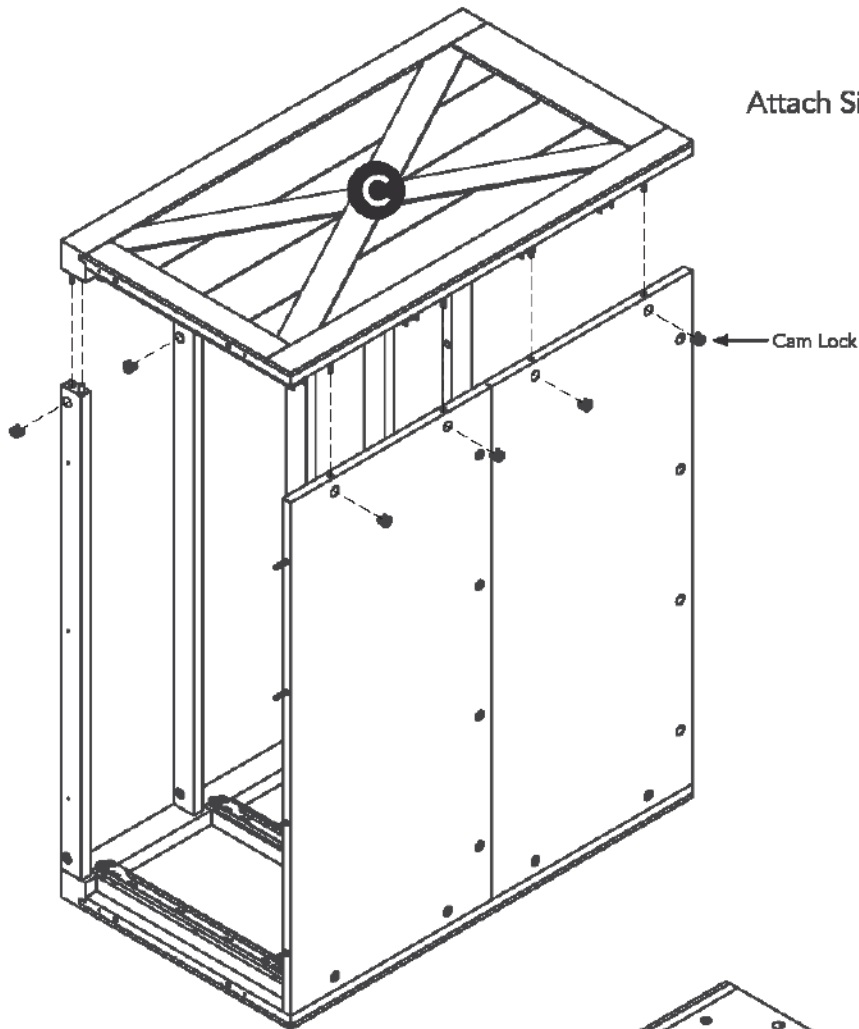

STEP 5


Attach Bottom (G) to unit with Wooden Dowels, Cam Locks and 1 1/4" Round Head Screws.

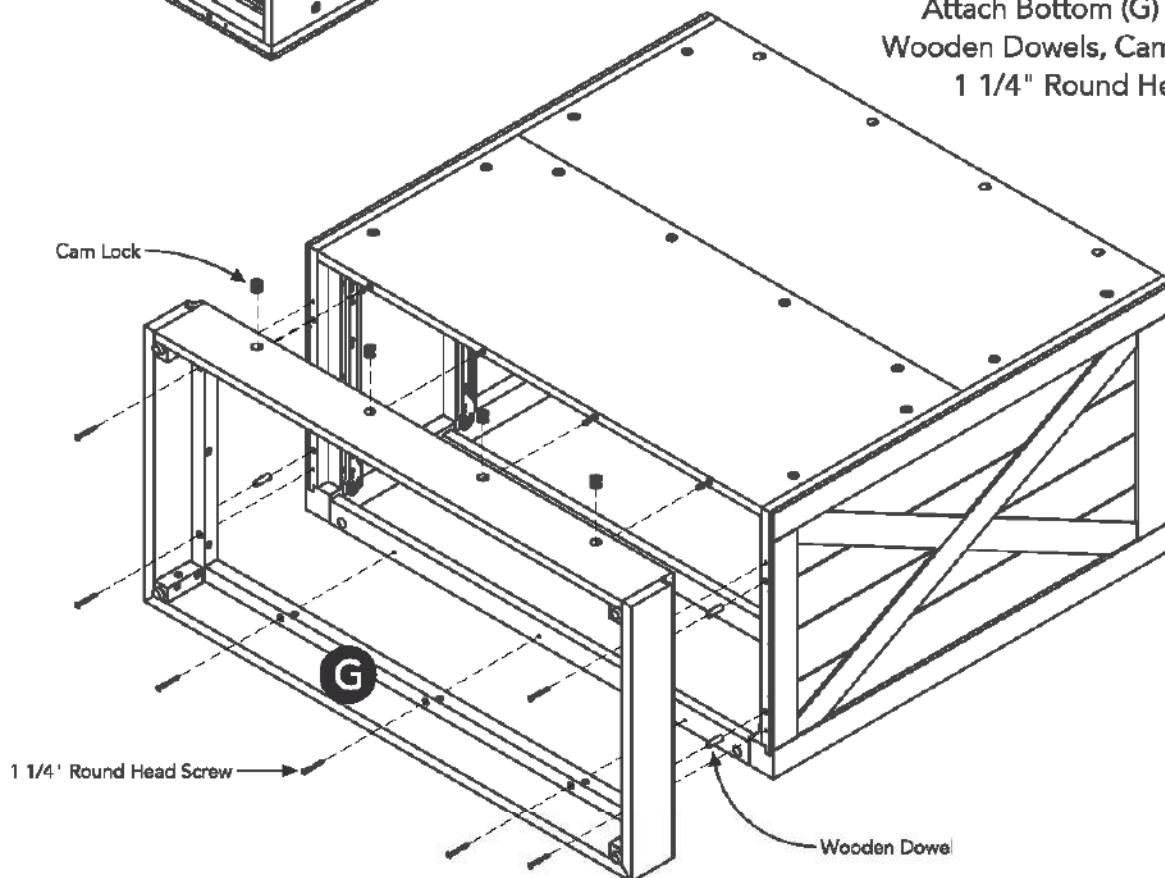

STEP 6

Attach Top (A) to unit with Wooden Dowels, Cam Locks and 1 3/4" Round Head Screws.

Note: A Phillips screwdriver 5" or less in length is recommended.

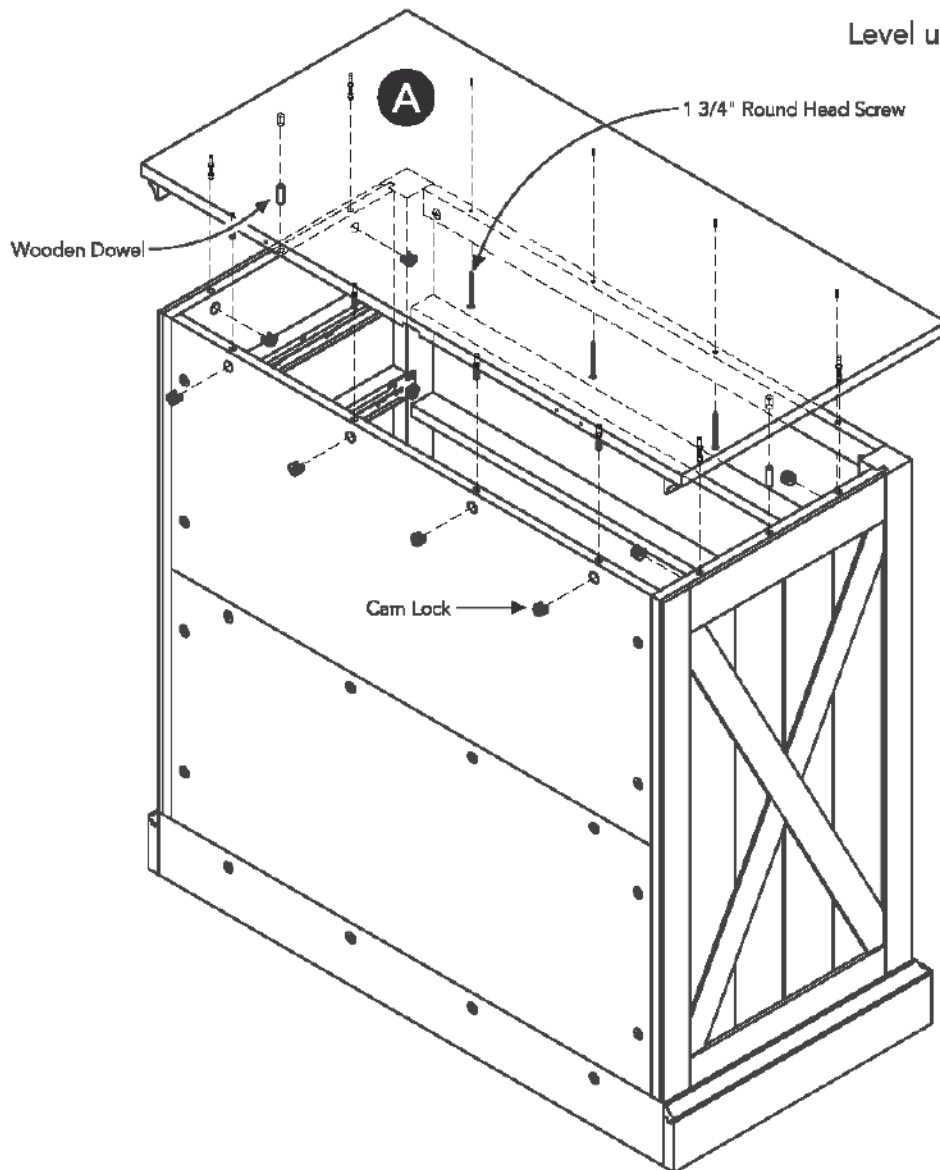

Level unit by adjusting the adjustable levelers on bottom of unit.
(See Figure 2)

Note: Unit must be level to work properly.

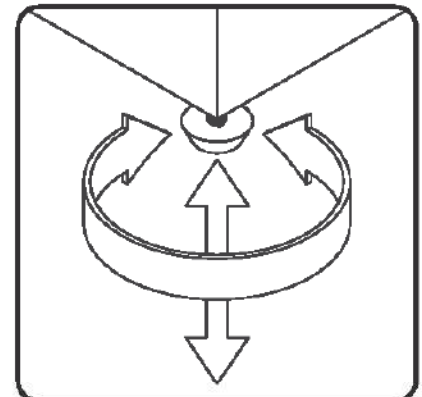


Figure 2

Assembly Instructions 6/11

IMPORTANT

- To help reduce the risk of the unit tipping over, the Tip-over Restraint must be installed following these instructions exactly.

STEP 7

Place unit at desired location.

Mark wall with pencil just above and in-line with hole in Top (A). (See Figure 3)

Move unit.

Drill a 3/8" hole in wall 1 1/2" below mark.

Insert Anchor into the wall hole and attach Tip-over Restraint to Anchor with 1 1/2" Round Head Screw and Flat Washer. (See Figure 4)

Move unit back into place and insert Tip-over Restraint into unit through hole in Top (A). (See Figure 5)

Attach Tip-over Restraint to unit with 1/2" Round Head Screw and Flat Washer. (See Figure 6)

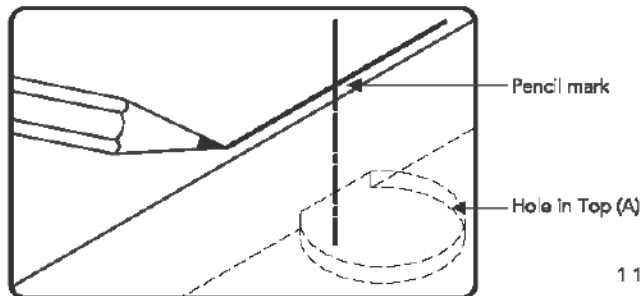
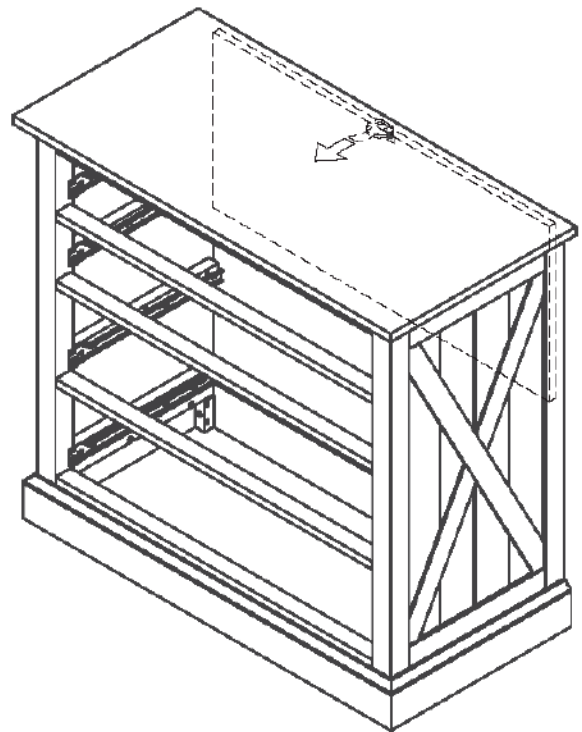


Figure 3

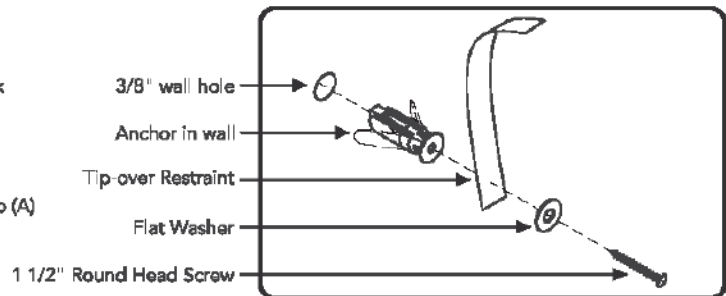


Figure 4

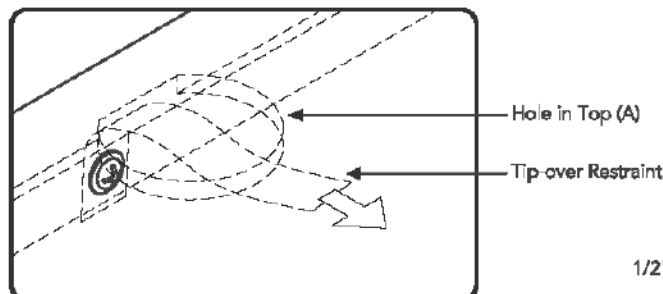


Figure 5

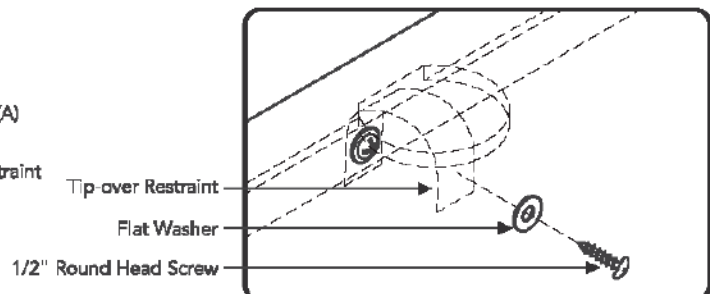


Figure 6

Hardware List



Tip-over Restraint
1 pc.



Anchor
1 pc. (+1 extra)



(M3x38)
1 1/2" Round Head Screw
1 pc. (+1 extra)




(M3x13)
1/2" Round Head Screw
1 pc. (+1 extra)



Flat Washer
2 pcs. (+1 extra)

Drawer (I)

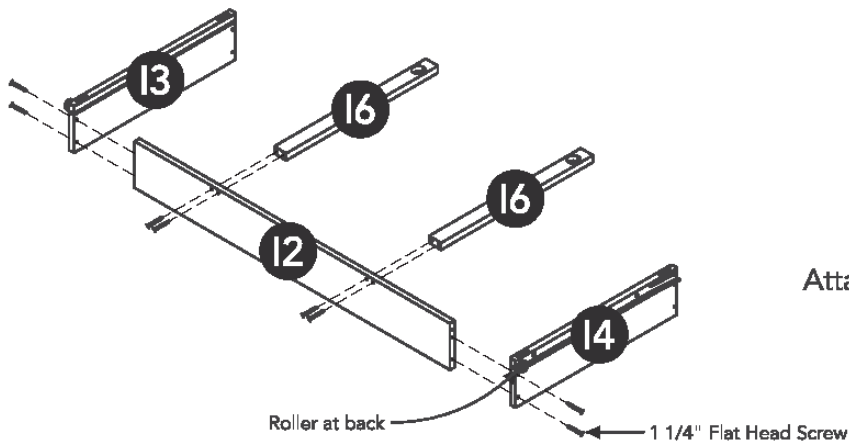



STEP 8

Attach Drawer Sides (13), (14) and Drawer Supports (16) to Drawer Back (12) with 1 1/4" Flat Head Screws.

STEP 9

Insert Drawer Bottom (15) into groove.

Attach Drawer Front (11) to unit with 1 1/4" Flat Head Screws.

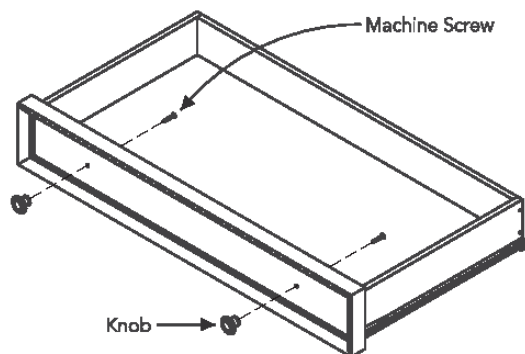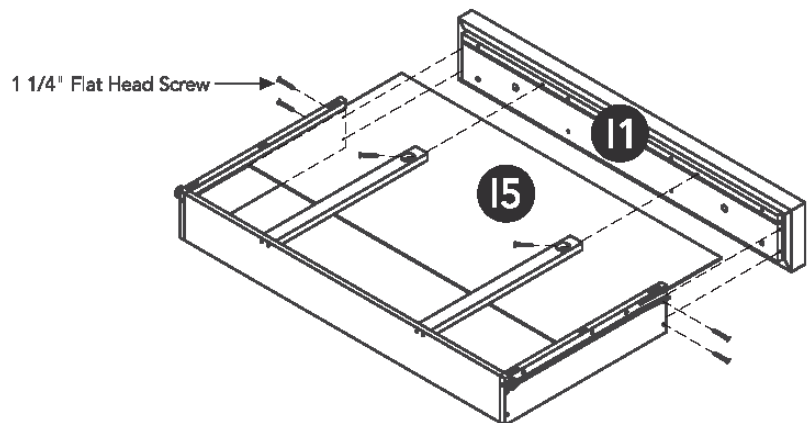


STEP 10


Attach Knobs with Machine Screws.

Note: Drawer assembly is not complete until 3/4" Flat Head Screws are used in a later step.

Part List

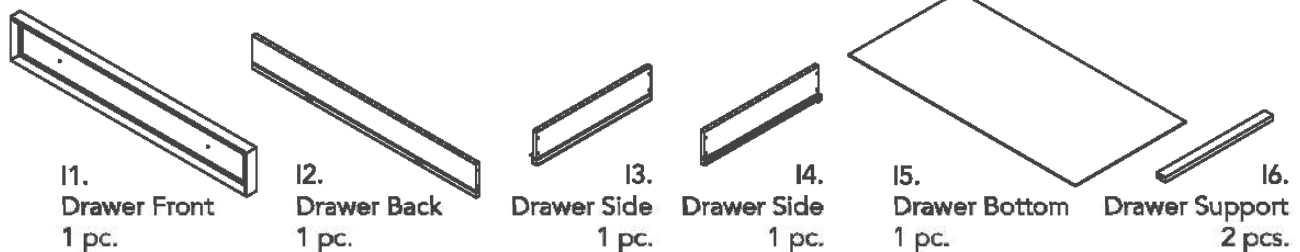

Drawer (J)

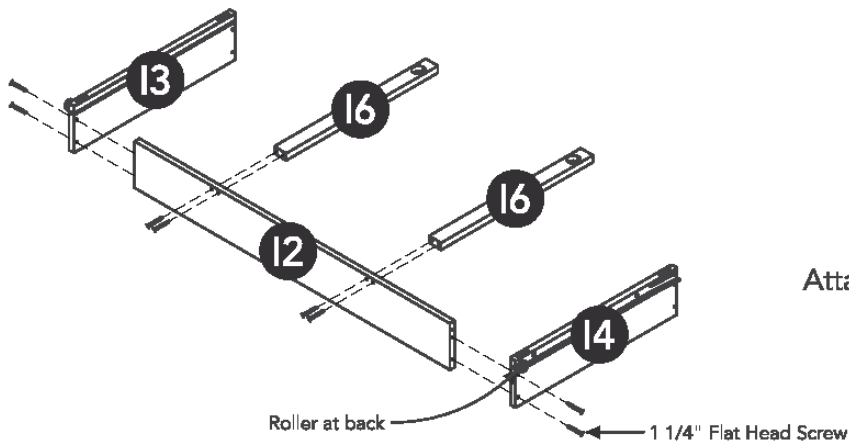



STEP 11

Attach Drawer Sides (13), (14) and Drawer Supports (16) to Drawer Back (12) with 1 1/4" Flat Head Screws.

STEP 12

Insert Drawer Bottom (J5) into groove.

Attach Drawer Front (11) to unit with 1 1/4" Flat Head Screws.

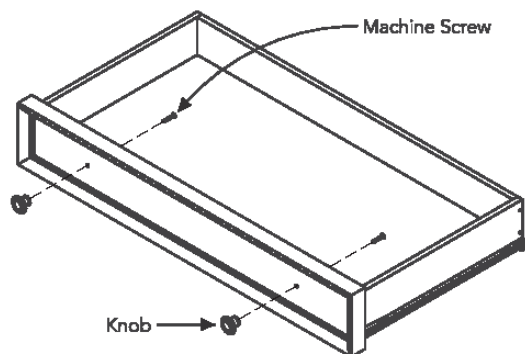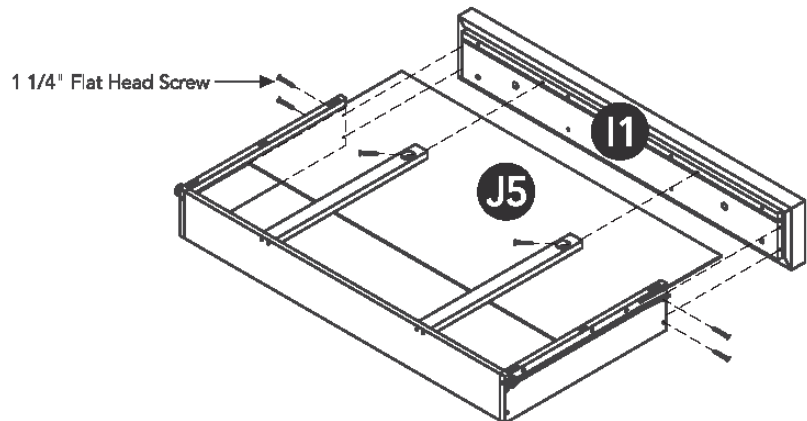


STEP 13


Attach Knobs with Machine Screws.

Note: Drawer assembly is not complete until 3/4" Flat Head Screws are used in a later step.

Part List

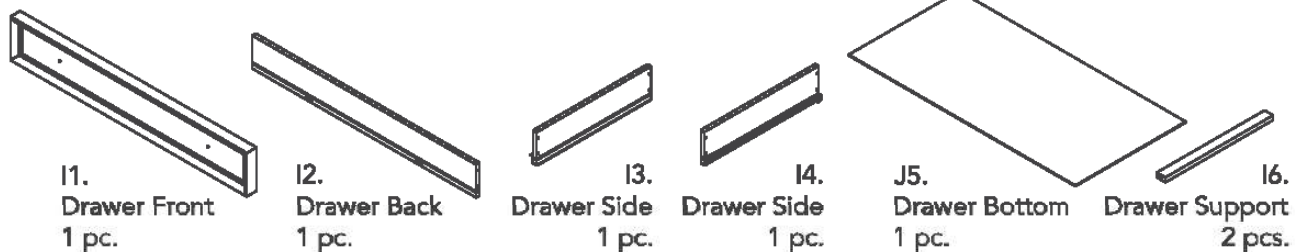

Drawer (K)

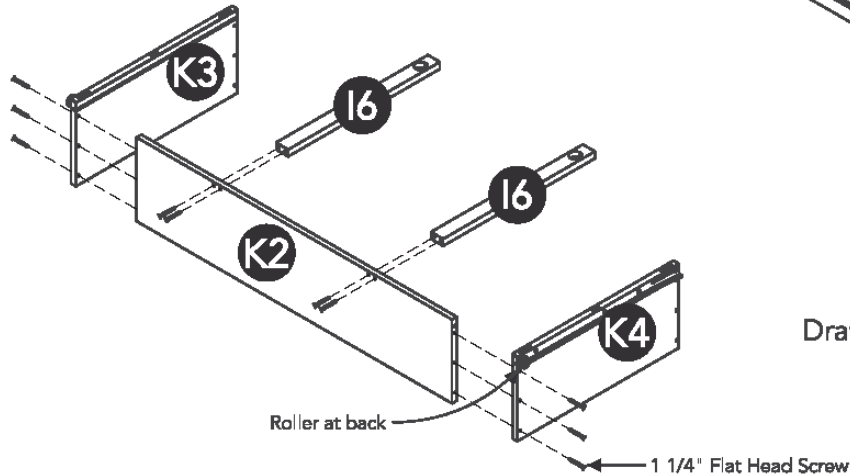



STEP 14

Attach Drawer Sides (K3), (K4) and Drawer Supports (I6) to Drawer Back (K2) with 1 1/4" Flat Head Screws.

STEP 15

Insert Drawer Bottom (J5) into groove.

Attach Drawer Front (K1) to unit with 1 1/4" Flat Head Screws.

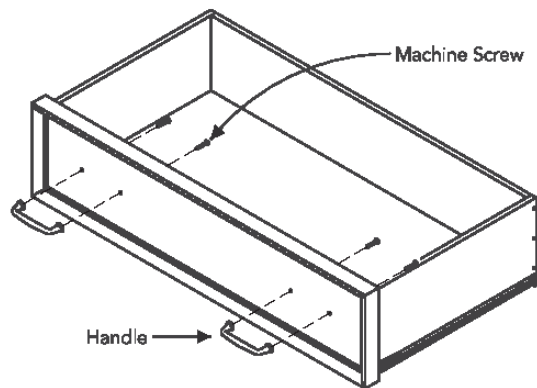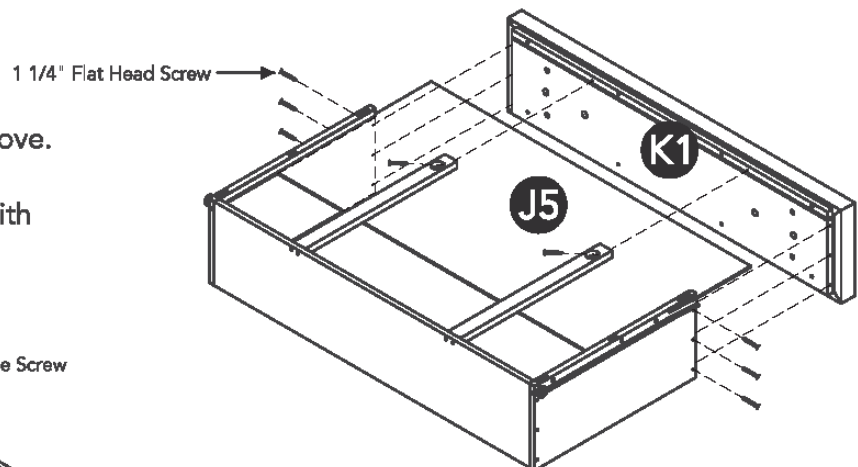


STEP 16

Attach Handles with Machine Screws.




Note: Drawer assembly is not complete until 3/4" Flat Head Screws are used in a later step.

Part List

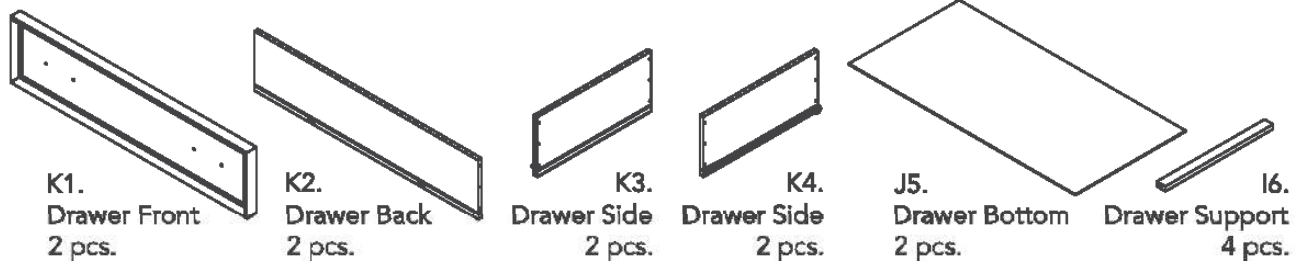

STEP 17

Loosen slightly the screws pre-installed on back of drawer fronts.

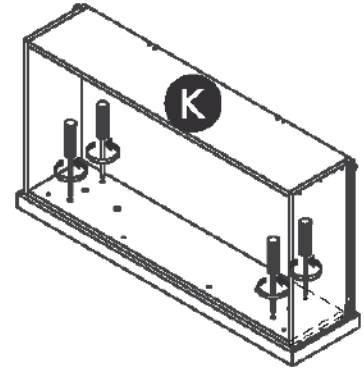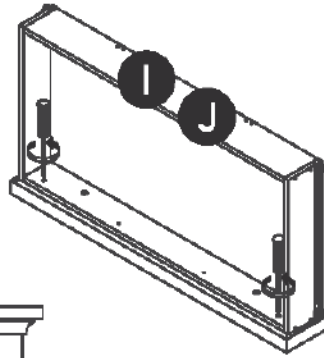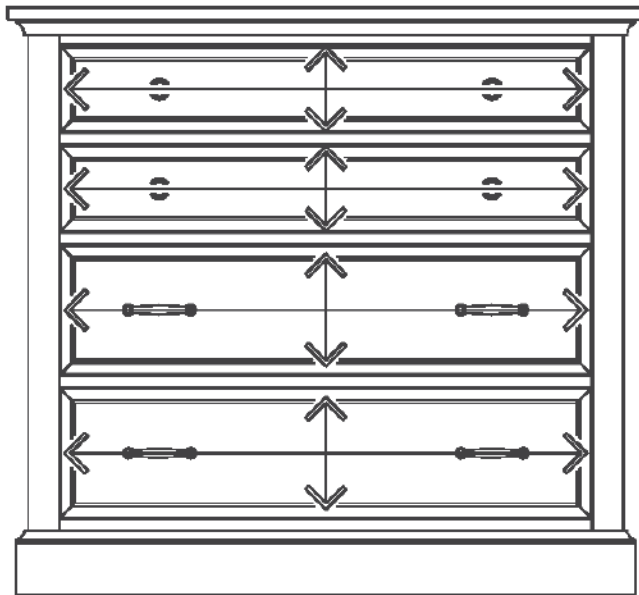

STEP 18



Insert drawers into unit, then adjust drawer front panels left or right and up or down until drawer gaps look proportional.

STEP 19

Pull each drawer open slowly and retighten screws from Step 17.


Make sure drawer front panels do not move and lock drawer front panels into position with 3/4" Flat Head Screws.

Note: These 3/4" Flat Head Screws must be installed to complete the drawer assembly.

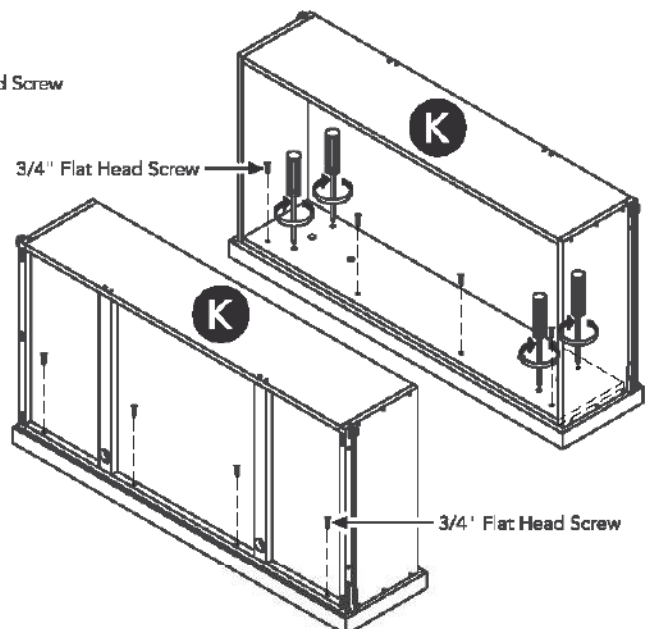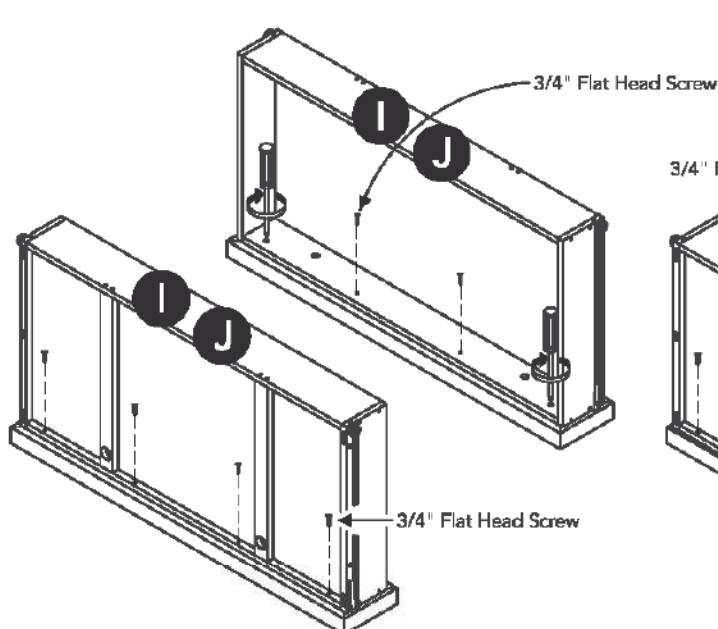

STEP 20

Slide Drawers (I), (J) and (K) into position.

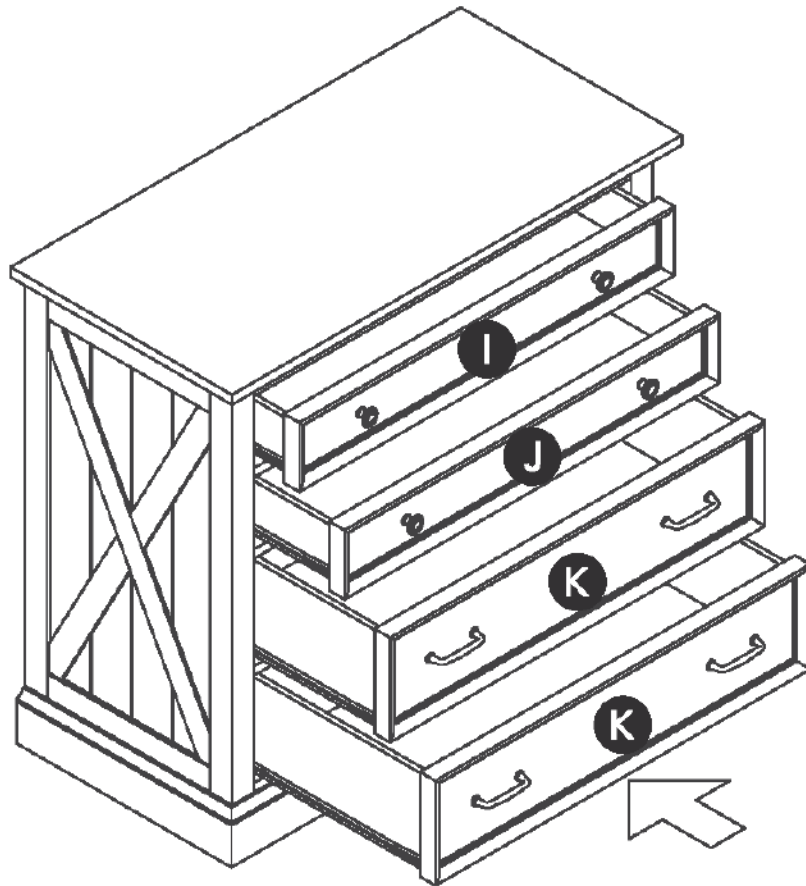

CARE INSTRUCTIONS

NEVER

allow liquids to remain on furniture.
Absorption causes parts to warp
and split and finishes to delaminate.

NEVER

use glass cleaners on
finished furniture. Ammonia
chemically attacks the finish.



Do not use power tools
above 8 volts to assemble.

**PREVENT
CRACKING**



Do not place
in direct sunlight.

**PREVENT
FADING**



Do not write
directly on surface.

**PREVENT
MARKING**



Do not place hot
objects on surface.

**PREVENT
FINISH DAMAGE**



Do not use rubber
based placemats.

**PREVENT
DISCOLORING**



Do not use commercial
waxes and polishes.

**PREVENT
YELLOWING**

CLEAN

with a soft cloth moistened
in lukewarm soap and water.
Buff with a dry clean cloth.



Home Styles will provide replacements free of charge for missing or damaged hardware or parts within 30 days of purchase. Digital images of the defective parts may be required. If the product was not purchased from an authorized retail affiliate, Home Styles is under no obligation to provide replacement parts. Parts are not available for fully assembled items nor are parts available for sale. Replacements for missing or damaged hardware or parts may be requested at: